

ECONO-PHASE® SHIFTERS

082014

Economical Solution for single motor applications where 100% continuous duty is not required.
Supplies both starting and running current from 1Ø service to all three legs
of 3Ø motor to provide high starting torque and rugged operation.

CONVERTER HP	240 VOLT				480 VOLT			
	CONVERTER TYPE	APPROX. WT(LBS)	1Ø FLA	ENCL #	CONVERTER TYPE	APPROX. WT(LBS)	1Ø FLA	ENCL #
3	2PS-OF	12	13	602	4PS-OF	16	7	602
5	2PS-OF	15	20	602	4PS-OF	13	10	602
7.5	2PS-OF	18	30	602	4PS-OF	17	15	602
10	2PS-OF	30	40	603	4PS-OF	18	20	602
15	2PS-OF	34	60	603	4PS-OF	30	30	603
20	2PS-OF	38	80	603	4PS-OF	32	40	603
25	2PS-OF	52	95	604	4PS-OF	37	48	603
30	2PS-OF	55	115	604	4PS-OF	49	58	604
40	2PS-OF	62	150	605	4PS-OF	53	75	604
50	2PS-OF	68	185	605	4PS-OF	63	93	605
60	2PS-OF	72	220	605	4PS-OF	65	110	605
75						70	140	605

Operate both WYE and DELTA motors, no “special” motor connections required




RONK

Sales Information: 1-800-221-7665 • **Service and Support:** 1-217-563-8333


PO Box 160, 106 E State Street, Nokomis, IL 62075-0160 • sales@ronkelectrical.com • www.ronkelectrical.com

ECONO-PHASE® SHIFTERS

DIMENSIONS OF NEMA 3R ENCLOSURES

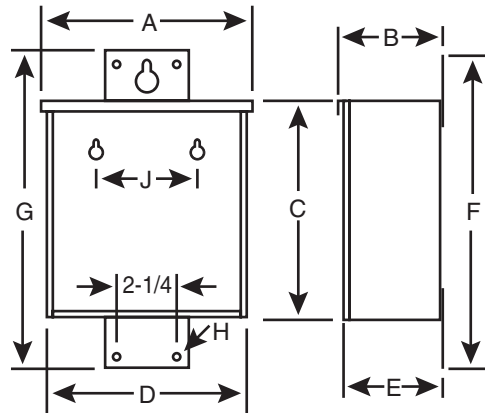

ENCLOSURE	A	B	C	D	E	F	G	H	J
602	14-1/4	8-1/2	12-7/8	13-7/8	8-1/4	17-1/4	16-1/8	9/32	

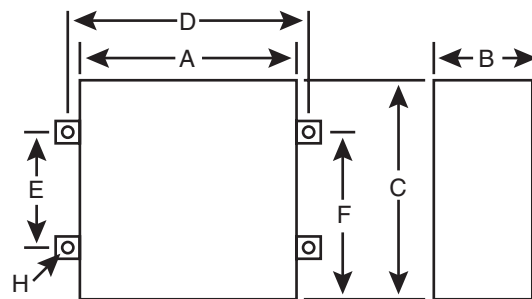

ENCLOSURE	A	B	C	D	E	F	H
603	17	11	16-1/8	18	10	13	1/2
604	25-1/2	11	17-5/8	28	14-1/2	15-1/2	1/2
605	25-1/2	12	20-1/8	28	17	18	1/2

RONK

Sales Information: 1-800-221-7665 • Service and Support: 1-217-563-8333

PO Box 160, 106 E State Street, Nokomis, IL 62075-0160 • sales@ronkelectrical.com • www.ronkelectrical.com