

RS
SERIES

GENERAC®

RS SERIES PORTABLE GENERATORS



Easiest to Start Open Frame Portable Generator

RS SERIES PORTABLE GENERATORS 5500 - 7000 WATTS

RAPID START

Generac's Rapid Start portable generators with PowerDial™, provides back up power with the turn of a dial. The PowerDial streamlines the start-up process by putting all the controls on one convenient dial, so no more separate switches for turning on the engine, opening the fuel valve, or to adjust the choke.

1 1/4 inch hardened steel tube cradle for added durability and strength

Fold-down, locking handle for sturdy portability and compact storage

WHAT'S INCLUDED

- Wheel Kit
- Handle Kit
- Engine Oil
- Quick Start Guide
- Starting Battery (Electric start models)

PowerDial™ integrates the start, run and stop in one simple-to-use dial



Large-capacity fuel tank with incorporated fuel gauge for extended run times

Covered outlets provide added protection from the environment

Heavy-duty, never-flat wheels for reliable portability

Generac OHV engine with splash lubrication provides a long engine life



PowerDial™

SIMPLE AS ① START ② RUN ③ STOP




All startup essentials on a single dial: fuel valve, choke, start, and shutdown/store making it the easiest to start open frame generator.

1 Simply turn the dial to the Start position (Push the dial on the RS7000 electric start model or pull the recoil on the manual start RS5500 model)

2 Turn the dial to Run

3 When it's time to shut off power, simply turn the dial to Stop

Control Panel Features

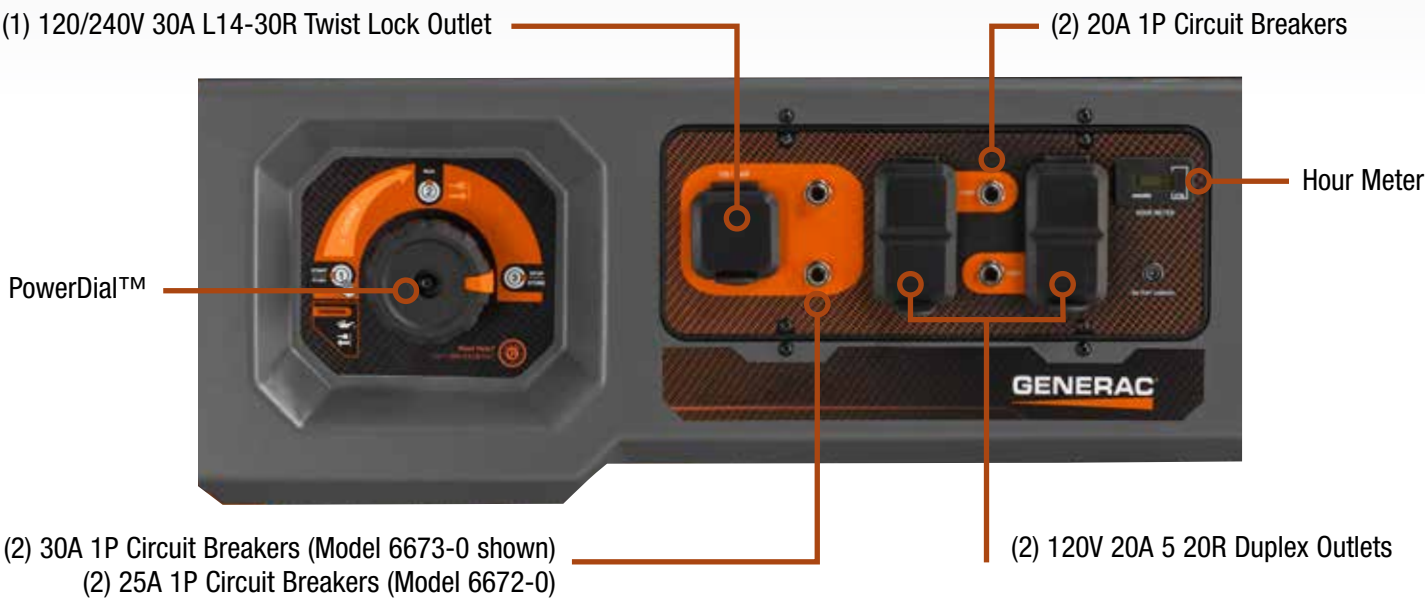

How much power do you need?

How do you determine what size generator you need?

Sizing a portable generator is relatively easy. Check out this sample:

- 1 Choose which devices you want to power at the same time.
- 2 Record and add the running watts listed for each device that you need to power.
- 3 Record the starting watts listed for each device.
- 4 Select the one device with the highest starting watts. Add that number to the total running watts to determine the total wattage requirement.

Device	Running Watts	Additional Starting Watts	Generator Size
Refrigerator	700	2200	Minimum starting watts for your needs ↓ 5050 starting watts
Microwave	1000	0	
Sump Pump 1/2 HP	1050	2150	
Lights	100	0	
Total	2850	+ 2200 =	

	Device	Running Watts	Additional Starting Watts
Household	Coffee Maker	1500	-
	Computer with a 17" Monitor	800	-
	Electric Range - 8" Element	2100	-
	Electric Water Heater	2000	1000
	Garage Door Opener-1/2 HP	875	2350
	Microwave - 1000 Watts	1000	-
	Refrigerator/Freezer	700	2200
	Sump Pump 1/2 HP	1050	2150
	Television - 27"	500	-
	Washing Machine	1150	2300
	Well Pump - 1/2 HP	1000	2100
	Central AC - 24,000 BTU	3800	4950
	Furnace Fan Blower - 1/2 HP	875	2300
	Heat Pump	4700	4500
Job Site	Window AC - 12,000 BTU	3250	3950
	Air Compressor - 1/2 HP	1000	2000
	Airless Paint Sprayer- 1/3 HP	600	1200
	Belt Sander - 3"	1200	2400
	Circular Saw - 7-1/4"	1400	2300
	Hand Drill - 1/2"	600	900
	Reciprocating Saw	960	-
	Quartz Halogen Work Light	1000	-
Recreation	Table Saw, 10"	2000	2000
	CD / DVD Player	100	-
	Color TV - 13"	150	-
	Inflator Pump	50	150
	Outdoor Light String	250	-
	Slow Cooker	250	-
	RV Air Conditioner (13,500 BTU)	1500	700

* Watts listed are approximate. Check your appliance for actual requirements. Total wattage requirements assumes intermittent starting of devices.

Portable Generator Specifications

Series	RS5500	RS7000E
Model Number (49 State/CSA Model Numbers)	6672/6674	6673/6675
Running Watts	5500	7000
Starting Watts	6875	8750
Engine Size	389cc	420cc
Engine Type	OHV	OHV
Low-oil Shutdown	Yes	Yes
Starting Method	PowerDial™ with Recoil Pull Start	PowerDial™ with Electric Start
Covered Outlets	Yes	Yes
Outlets	(2) 120V 20A 5-20R Duplex (1) 120/240V 30A L14-30R Twist Lock	(2) 120V 20A 5-20R Duplex (1) 120/240V 30A L14-30R Twist Lock
Fuel Tank Capacity (Gallons)	6.77	7.5
Run Time at 50%	11 Hours	12 Hours
Fuel Gauge	Yes	Yes
Hour Meter	Yes	Yes
Handles	Folding, Locking	Folding, Locking
Wheels	9.5" Never-flat Wheels	9.5" Never-flat Wheels
First Oil Included	Yes	Yes
Emission Certified	EPA - 49 States	EPA - 49 States
Warranty	2 Year Limited	2 Year Limited
Dimensions (L" x W" x H")	27.25 x 27 x 25	27.25 x 27 x 25
Product Weight	172	192
UPC	696471066722	696471066739

All portable specifications and models subject to change. Please consult factory for availability.

HOME STANDBY GENERATORS

The Safe, Automatic Solution for Home Backup.

The power goes out and the generator goes on – whether you are home or away. It's that's simple. Install the #1 selling home standby generator from Generac and never again deal with extension cords or refuelling in a storm. Instead, enjoy safe, automatic home protection from the inconveniences and potentially dangerous effects of power outages. There's nothing like the peace of mind a Generac automatic home standby generator can give to you and your family.



AUTOMATIC 24/7 POWER PROTECTION

Portable power since 1959

Since the original portable that started it all in 1959, Generac has continued to engineer advances in standby power for more than fifty years. Generac's product range includes power solutions from portable and automatic home standby generators to backup systems for commercial and industrial applications, all backed by an extensive nationwide service network of certified dealers. Because of our ongoing commitment to quality and innovation, Generac is the name home and business owners have come to trust.

Portable Parts and Service

Generac portable generators are supported through an extensive nationwide service network that provides parts and technical support to homeowners and contractors. For a portable generator dealer near you, visit generac.com.

GENERAC®



0K9559 / Printed in USA / Rev. A 08/2014
©2014 Generac Power Systems, Inc. All rights reserved.
Specifications are subject to change without notice.

Generac Power Systems, Inc.
S45 W29290 Hwy. 59
Waukesha, WI 53189
1-888-GENERAC (1-888-436-3722)

generac.com