




The KOHLER Advantage

- **Built to Last Since 1920**
For over 90 years, hospitals, airports and military bases around the world have depended on KOHLER generators.
- **Premium Warranty**
You get our premium 3-year limited warranty backed by a network of more than 10,000 dealers.
- **Custom Kits**
Legs, handles, wheels, lifting kits - whatever you want, any way you want it.
- **Free Loaner Program***
If your KOHLER generator ever goes down, just swing by one of our select dealers. We'll provide a free loaner unit for warranty repairs exceeding 24 hours.

Standard Features

- **Light, Compact Design**
At 44.1 pounds with a footprint of 19.2 x 11 inches, the PRO2.0iS is one of the lightest 2 kW inverter generators.
- **Parallel-Capable**
Double your power output when you use the parallel kit with two identical PRO2.0iS portable generators.
- **Smart, Clean Power**
Senses power demand and produces only the needed power, saving fuel and reducing exhaust gases and wear and tear for long product life.
- **Inverter Technology**
Output current safely powers sensitive electronics.
- **Extra Engine Protection**
Oil Sentry™ automatically shuts engine down in low-oil conditions.
- **Quiet Operation**
Enclosed design combined with demand-based operation provides quiet power.

Control Panel

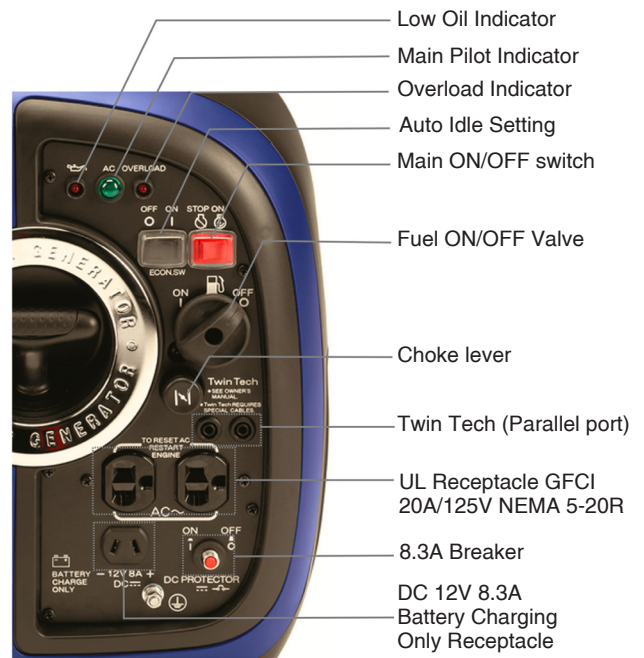

* At participating dealers, based on availability.

Specifications



| | |
|---|---|
| Model Name | PRO2.0iS |
| Model spec | PA-PRO20iS-3001 PA-PRO20iS-1001 |
| Compliance | 3001 (EPA/CARB) 1001 (CSA) |
| AC rated output (running watts) | 1,600 |
| AC maximum output (motor starting watts) | 2,000 |
| AC voltage | 120 |
| AC frequency (Hz) | 60 |
| Total Harmonic Distortion | ≤ 5% |
| Rated AC amperage | 13.3 |
| Max rated amperage | 16.7 |
| Engine displacement | 79cc |
| Fuel type | Gasoline |
| Engine RPM | 3000-4500 |
| Recommended oil | 4-Stroke Engine Oil API Service Classification SE Type or Higher |
| Automatic voltage regulation | Yes |
| Choke location | On Control Panel |
| Fuel shut off | On Control Panel |
| Starting method | Recoil Only |
| Low oil shutdown method | Low Level |
| Neutral | Neutral Bonded to Frame |
| Start switch type | Toggle Type Off-On (Red) |
| Switch location | On Control Panel |
| Fuel gauge | Yes |
| Fuel tank capacity | 1.1 gal/4.1 liters |
| Run time @ 50% (hours) | 7.9 |
| Warranty - Residential | 3 Years |
| Warranty - Commercial | 3 Years |

Available Options

- Parallel Kit

Generator Set Dimensions and Weights

| | |
|-------------------------------|------------------------------------|
| A mm (in.): 490 (19.3) | Carton Length mm (in.): 555 (21.8) |
| B mm (in.): 280 (11) | Carton Width mm (in.): 365 (14.4) |
| C mm (in.): 455 (18) | Carton Height mm (in.): 495 (19.5) |
| Unit Weight lbs (kg): 44 (20) | Shipping Weight lbs (kg): 49 (22) |



NOTE: Dimensions are provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY:

© 2014 by Kohler Co. All rights reserved.