

T08071

GAS: 10000 / 8000 WATT - **LPG: 9050 / 7250 WATT** - **NG: 8000 / 6400 WATT**
 50A 120/240V ELECTRIC START TRI FUEL PORTABLE GENERATOR
 EPA AND CARB CERTIFIED

FIRMAN
 POWER EQUIPMENT

8716 WEST LUDLOW DR. SUITE #6
 PEORIA, AZ 85381
 1-844-347-6261
 WWW.FIRMANPOWEREQUIPMENT.COM

UPC // 840876180716

GAS STARTING / RUNNING WATTS // 10000 / 8000

LPG STARTING / RUNNING WATTS // 9050 / 7250

NG STARTING / RUNNING WATTS // 8000 / 6400

VOLTAGE // 120 / 240V

FREQUENCY // 60Hz

ENGINE TYPE // OHV

STARTING SYSTEM // ELECTRIC / RECOIL

FUEL TANK SIZE // 8.0 GAL

RUN-TIME (GAS) // UP TO 12 HRS (@50% LOAD)

DECIBLES // 72 dB (@7m @75% LOAD)

CARTON L×W×H // 32.1" × 22.2" × 24.4"

GROSS WEIGHT // 230 LBS.

UNIT WEIGHT // 212 LBS.

UNITS PER PALLET // 4

UNITS PER CONTAINER // 188 / 40HQ

BONUS // 5' LP HOSE





CONTROL PANEL

(2) 5-20R 20A-120V GFCI

(1) 14-50R 50A-120/240V

(1) L14-30R 30A-120V/240V TWIST LOCK

(1) L5-30R 30A 120V TWIST LOCK

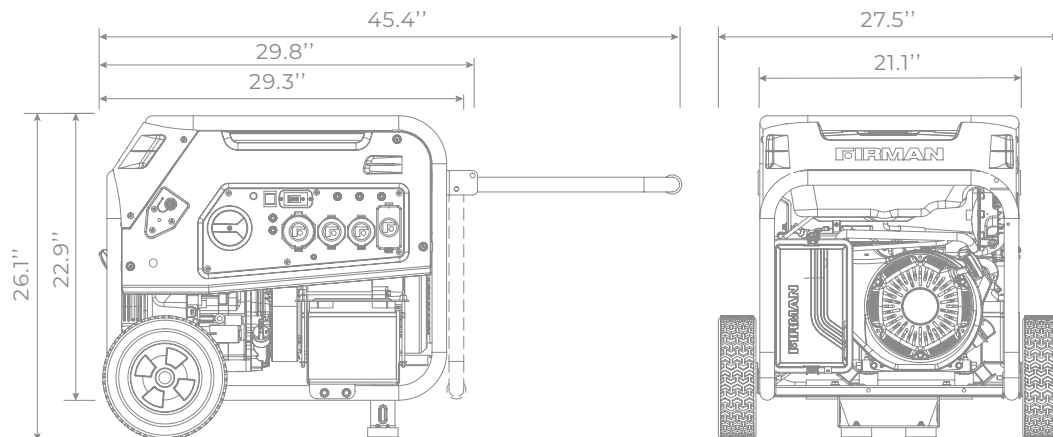

BEST USED



FIRMAN

10000 STARTING WATTS MAXIMUM POWER	9050 STARTING WATTS MAXIMUM POWER	8000 STARTING WATTS MAXIMUM POWER
8000 RUNNING WATTS MAXIMUM POWER	7250 RUNNING WATTS MAXIMUM POWER	6400 RUNNING WATTS MAXIMUM POWER



Fuel Selector Switch
Inverter Selector & Carburetor
Carburetor Selector

NEUTRAL POSITION TO FRAME
MAINTAIN CONTACT AT ALL TIMES
NEUTRAL AND ALL MODES A LA CONTACT DE NEUTRE



FIRMAN

12V 15Ah/20HR

CAUTION:
• Maintenance free, no water or electrolyte supply.
• Do not incinerate.
• Keep fire away and do not expose to hot environment.
• Charge the battery, if hours by charger with AC current, or maintain start the generator to run for several hours if the generator running time is less than 10 hours with in three months.

