

iPro4200

4200 Watt Open Frame Digital Inverter Gasoline Portable Generator

3500 Running Watts | 4200 Peak Watts



50 State Model



Fuel efficient, 4 gallon fuel tank that runs 22 hrs at 25% load

Two 5V USB ports for charging sensitive electronics such as phones or tablets

OSHA GFCI outlets, three 120V 20A duplex 5-20R outlets

VFT meter displays volts, frequency, and lifetime hours

Fuel efficiency of enclosed inverter combined with durability of open frame generator



<3% THD 
SINE WAVE OUTPUT



Dependable 5.8 HP 212cc OHV 4-Stroke Westinghouse engine




A variable speed engine and low tone mufflers significantly reduce operating noise

What Comes in the Box



Control Panel

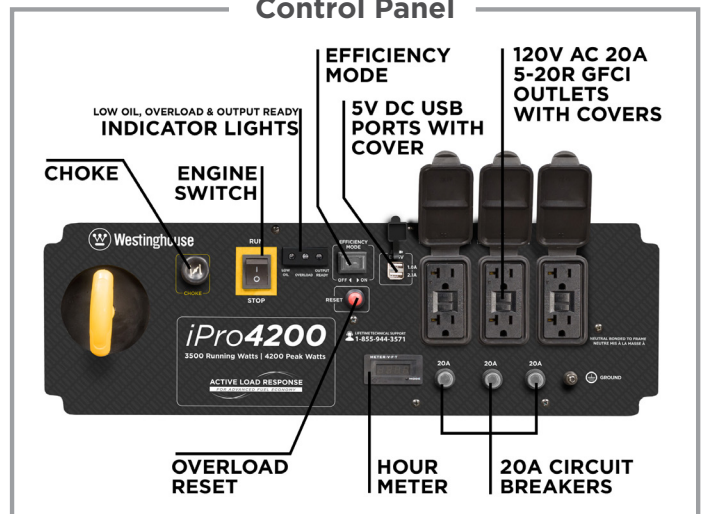

iPro4200

Open Frame Inverter Generator Specifications



| | |
|--|--|
| Gasoline Peak Watts | 4200 |
| Gasoline Running Watts | 3500 |
| Peak Amps at 120V | 35 amps |
| Running Amps at 120V | 29 amps |
| AC Voltage | 120 Volts |
| DC Voltage | 5 Volts |
| AC Frequency | 60 Hz |
| Parallel Capable | No |
| Engine Horse Power (HP) | 5.8 HP |
| Total Harmonic Distortion (THD) | <3% |
| Automatic Voltage Regulator (AVR) | Yes |
| Starting System | Recoil |
| Battery Included | No |
| Engine Displacement | 212cc |
| Engine Brand | Westinghouse |
| Engine Type | OHV 4 Stroke |
| Engine Speed | Variable |
| Engine RPM | Max 3800 |
| Operational Volume | As low as 62 dBA |
| Spark Plug (included) | Torch F7TC |
| Carburetor Kit Required to Operate at Altitude | Yes |
| Altitude Carburetor Kit Number (sold separate) | 140545 |
| Economy Mode Switch | Yes |
| Built-in Inverter | Yes |
| Engine Lubrication | Splash |
| Recommended Oil | SAE 10W30 |
| Oil Bottle Size (included) | .6 qt. (20.3 oz.) |
| Oil Capacity (Quarts/Ounces) | .6 qt. (20.3 oz.) |
| Low Oil Shutdown | Automatic |
| Fuel Type | Unleaded Gasoline, 10% Ethanol or less |
| Fuel Shut Off | Manual |
| Fuel Tank Material | Steel |
| Fuel Tank Capacity (Gallons/Liters) | 4 gal. (15 L) |
| Run Time at %25 Load (hrs.) | 22 hrs. |
| Run Time at %50 Load (hrs.) | 16 hrs. |
| Gasoline Fuel Gauge | Yes |
| Choke type | Manual |

| | |
|---|----------------------------------|
| AC Outlets | (3) Duplex 120V 20A GFCI (5-20R) |
| DC Outlets | (2) 5V USB ports |
| Ground | Neutral Bonded to Frame |
| Covered Outlets | Yes |
| Transfer Switch Ready | No |
| Westinghouse Portable Transfer Switch Ready | No |
| Volts, Frequency, Lifetime Hour Meter | Yes |
| GFCI Outlets | Yes |
| OSHA Compliant | Yes |
| LED Data Center | No |
| RV Ready Outlet | No |
| Overload Protection (circuit breaker) | Yes |
| Handle | No |
| Emissions | EPA, CARB |
| Canada CSA Compliant | No |
| Wheel Kit Included | No |
| Wheel Kit Ready | Yes |
| Muffler | Pulse-Flo™ |
| Spark Arrestor | Yes |
| Residential Warranty | 3 Years |
| Commercial Warranty | 1 Year |
| Assembled Length in. (mm) | 24 in. (609 mm) |
| Assembled Width in. (mm) | 20.5 in. (520 mm) |
| Assembled Height in. (mm) | 20 in. (508 mm) |
| Carton Length in. (mm) | 25 in. (635 mm) |
| Carton Width in. (mm) | 20 in. (508 mm) |
| Carton Height in. (mm) | 20 in. (508 mm) |
| Dry Unit Weight lb. (kg) | 82 lb. (37 kg) |
| Shipping Weight lb. (kg) | 87 lb. (39 kg) |
| UPC | 855464003735 |
| GTIN | 00855464003735 |

05302018KD

©2018 Westinghouse Outdoor Power Equipment
Specifications are subject to change without notice
Westinghouse Portable Power
777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team
at service@wpowereq.com or call
855.944.3571**

