

WGen2000

2000 Watt Open Frame Gasoline Portable Generator

2000 Running Watts | 2500 Peak Watts



50 State and
Canada Model

Rugged roll bars for added
strength and protection

Lightweight and compact
with rugged frame


Easy start yellow touch points
on choke, engine control
switch and oil fill cap

Dependable 4.6 HP 212cc OHV
4-Stroke Westinghouse engine



Pulse-Flo™ quiet muffler
with EPA & CARB compliant
emissions

Fuel gauge on top of
4 gal. tank

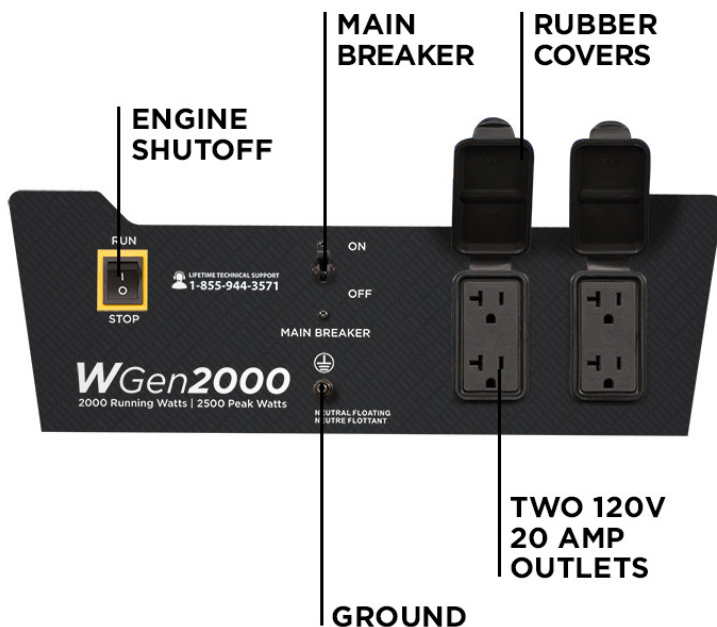

What Comes in the Box



WGen2000

Generator Specifications



Gasoline Running Watts	2000
Gasoline Peak Watts	2500
Running Amps	17 amps
Peak Amps	21 amps
AC Voltage	120 Volts
AC Frequency	60 Hz
Engine Horse Power (HP)	4.6 HP
Total Harmonic Distortion (THD)	<23%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Recoil
Battery	No
Push Button Start	No
Mobile App Compatible	No
Engine Displacement	212cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine RPM	3600
Operational Volume (dBA)	68 dBA
Spark Plug (included)	Torch F7TC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140544
Auto Idle Control	No
Built-in Inverter	No
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.6 qt. (20.3 oz.)
Oil Capacity (Quarts/Ounces)	.6 qt. (20.3 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, %10 Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	4 gal. (15 L)
Run Time at %25 Load (hrs.)	26 hrs.
Run Time at %50 Load (hrs.)	20 hrs.

Gasoline Fuel Gauge	Yes
Choke type	Manual
Choke Location	Above Air Filter
AC Outlets	(2) 120V 20A (5-20R)
Ground	Floating Neutral
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready (ST Switch)	No
GFCI Outlets	No
VFT Data Center (volts, frequency, lifetime hours)	No
RV Ready Outlet	No
Overload Protection (circuit breaker)	Yes
Wheel Kit Included	No
Frame Thickness in. (mm)	1 in. (25 mm)
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years or 1000 hrs
Commercial Warranty	6 Months or 1000 hrs
Assembled Length in. (mm)	23.3 in. (590 mm)
Assembled Width in. (mm)	17.5 in. (445 mm)
Assembled Height in. (mm)	18.7 in. (475 mm)
Carton Length in. (mm)	23.9 in. (608 mm)
Carton Width in. (mm)	18.3 in. (465 mm)
Carton Height in. (mm)	19 in. (485 mm)
Dry Unit Weight lb. (kg)	90.6 lb. (41.1 kg)
Shipping Weight lb. (kg)	97 lb. (44 kg)
UPC	855464003957
GTIN	00855464003957

09252017KD
 ©2017 Westinghouse Portable Power
 Specifications are subject to change without notice
 Westinghouse Portable Power
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team
 at service@wpowerreq.com or call
 855.944.3571**

