

WPro12000

12000 Watt Heavy Duty Open Frame Gasoline Portable Generator

12000 Running Watts | 15000 Peak Watts



50 State Model



Lift bracket included for
job site cranes

Fuel efficient, 10.5 gallon
fuel tank that runs 16 hrs
at 25% load

VFT meter displays volts,
frequency, and lifetime hours

Two 5V USB ports for charging
sensitive electronics such as
phones or tablets

OSHA compliant full panel
GFCI, 120V and 240V outlets

Electric, and remote start
with automatic choke,
battery included

Heavy duty wheels for rough
job site surfaces

SMART IDLE
FOR INCREASED FUEL EFFICIENCY

**SINE WAVE / OUTPUT
<5% THD AVR
EQUIPPED**
(Less Than 5% Total Harmonic Distortion)




Heavy Duty 22 HP 713cc V-Twin
Westinghouse engine

What Comes in the Box



Control Panel

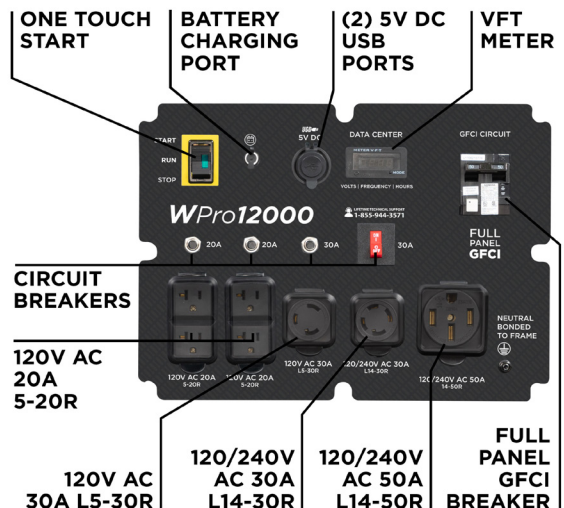

WPro12000

Heavy Duty Open Frame Generator Specifications



| | |
|--|---|
| Gasoline Running Watts | 12000 |
| Gasoline Peak Watts | 15000 |
| Running Amps | 100A @ 120V 50A @ 240V |
| Peak Amps | 125A @ 120V 63A @ 240V |
| AC Voltage | 120/240 Volts |
| DC Voltage | 5 Volts |
| AC Frequency | 60 Hz |
| Parallel Capable | No |
| Engine Horse Power (HP) | 22 HP |
| Total Harmonic Distortion (THD) | <5% |
| Automatic Voltage Regulator (AVR) | Yes |
| Smart Idle Control | Yes |
| Starting System | Electric, Remote |
| Battery Included | Yes |
| Battery Charger Included | Yes |
| Remote Start Fob Included | Yes (factory paired) |
| Remote Start Distance (yards/meters) | 109 yd. (100 m.) |
| Push Button Start | No |
| Engine Displacement | 713cc |
| Engine Brand | Westinghouse |
| Engine Type | V-Twin |
| Engine RPM | 3600 |
| Operational Volume | As low as 75 dBA |
| Spark Plug (included) | Torch F7TC |
| Carburetor Kit Required to Operate at Altitude | Yes |
| Altitude Carburetor Kit Number (sold separate) | 140578 |
| Engine Lubrication | Pressure |
| Recommended Oil | SAE 10W30 |
| Oil Bottle Size (included) | 1.6 qt. (51.2 oz) |
| Oil Capacity (Quarts/Ounces) | 1.6 qt. (51.2 oz) |
| Low Oil Shutdown | Automatic |
| Fuel Type | Unleaded Gasoline, 10% Ethanol or less |
| Fuel Shut Off | Manual |
| Fuel Tank Material | Steel |
| Fuel Tank Capacity (Gallons/Liters) | 10.5 gal. (40 L) |
| Run Time at %25 Load (hrs.) | 16 hrs. |
| Run Time at %50 Load (hrs.) | 11 hrs. |

| | |
|--|--|
| Gasoline Fuel Gauge | Yes |
| Choke type | Automatic |
| AC Outlets | (2) 120V 20A (5-20R), (1) 120V 30A (L5-30R), (1) 120/240 30A (L14-30R), (1) 120/240V 50A (14-50R) |
| DC Outlets | (2) 5V USB ports |
| Ground | Neutral Bonded to Frame |
| Covered Outlets | Yes |
| Transfer Switch Ready | Yes |
| Westinghouse Portable Transfer Switch Ready | No |
| Volts, Frequency, Lifetime Hour Meter | Yes |
| GFCI Outlets | Full Panel GFCI |
| OSHA Compliant | Yes |
| LED Data Center | No |
| RV Ready Outlet | No |
| Overload Protection (circuit breaker) | Yes |
| Handle | Yes |
| Emissions | EPA, CARB |
| Canada CSA Compliant | No |
| Heavy Duty Wheel Kit Included | Yes |
| Wheel Size | 12 in diameter, 3 in wide |
| Lifting Bracket | Yes |
| Muffler | Pulse-Flo™ |
| Spark Arrestor | Yes |
| Residential Warranty | 3 Years |
| Commercial Warranty | 1 Year |
| Assembled Length in. (mm) | 34 in (864 mm) |
| Assembled Width in. (mm) | 31 in (787 mm) |
| Assembled Height in. (mm) | 35 in (889 mm) |
| Extended Length in. (mm) | 53 in (1346 mm) |
| Carton Length in. (mm) | 35 in (889 mm) |
| Carton Width in. (mm) | 24 in (609 mm) |
| Carton Height in. (mm) | 38 in (965 mm) |
| Dry Unit Weight lb. (kg) | 352 lb. (160 kg) |
| Shipping Weight lb. (kg) | 418 lb. (189 kg) |
| UPC | 855464003766 |
| GTIN | 00855464003766 |

09282018KD
©2018 Westinghouse Outdoor Power Equipment
Specifications are subject to change without notice
Westinghouse Portable Power
777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team
at service@wpowereq.com or call
855.944.3571**

