



Covers have been removed for illustration.

Model RXT Automatic Transfer Switch

The Model RXT automatic transfer switch is designed for use only with Kohler® generator sets equipped with RDC2 or DC2 generator set/transfer switch controls. The transfer switch operation is controlled by the RDC2/DC2 integrated generator set/transfer switch controller.

Standard Features

- Allows utility voltage display on the RDC2/DC2 integrated generator set/transfer switch controller, available exclusively on Kohler® residential and light commercial generator sets
- Interface board for connection to the Model RDC2 or DC2 generator set/transfer switch controller (mounted on generator set models listed above)
- UL listed
 - Models with load centers, UL 67 listed, file #E251086
 - Models without load centers, UL 1008 listed, file #E58962
- CSA certification, file #LR58301, is available for:
 - Standard ATS without load center (single and three-phase)
 - Service entrance ATS 100, 150, and 200 amp models
- Corrosion-resistant NEMA 3R aluminum enclosure
 - Padlockable
 - Approved for indoor or outdoor installation
 - ANSI 49 gray
- NEMA 1 enclosure available on 100 amp load center models
- Contactor electrically and mechanically interlocked
- Double throw inherently interlocked design
- Contactor manually operable for maintenance purposes
- Silver alloy main contacts
- Transfer switches are 100% equipment rated and can be applied at the rated current without derating (non-service entrance models)
- Service entrance models include disconnect circuit breaker on the utility (normal) source side (80% rated)
- Five-year limited warranty

Available Models

- 100, 200, and 400 amp standard and service entrance models are available.
- 150 and 300 amp service entrance models are also available.
- 100 amp standard single-phase models are available with or without a 16-space load center. Up to 8 tandem breakers can be used for a total of 24 circuits.
- 100 Amp standard single phase model with a 12-space load center and a NEMA 1 enclosure is available as a standalone non-configurable spec (GM85273-SA_).
- See page 6 for more information.

Optional Accessories

The following optional accessories are available:

Status indicator kit

- LED indicators for source availability and contactor position
- Mounts on the outside of the RXT enclosure
- Dimensions: 92 mm x 42 mm (3.62 in. x 1.65 in.)
- View transfer switch status without removing enclosure cover
- An overhang on the enclosure protects the indicator panel and ribbon cable opening
- For more information on the status indicator kit, see specification sheet G11-123

Load shed kit

- Automatically sheds non-critical loads when essential appliances are running
- Prevents generator overload in compliance with NEC 2008
- Provides two (2) HVAC relays, rated 10 A @ 125 VAC, to control two independent air conditioner loads
- Includes four (4) pilot relays rated 120VAC, 125VA (pilot duty), 10 A @ 125 VAC (general purpose) to control customer-provided power relays for non-essential loads
- Mounts inside the ATS enclosure
- Uses Kohler's exclusive RBUS communication protocol
- Requires Kohler® residential generator set with RDC2 or DC2 controller
- For more information on the load shed kit, see specification sheet G11-124

Codes and Standards

The ATS meets or exceeds the requirements of the following specifications:

- Underwriters Laboratories UL 67, Enclosed Panel Boards (load center models) file #E251086
- Underwriters Laboratories UL 1008, Standard for Automatic Transfer Switches for Use in Emergency Systems, file #E58962
- Underwriters Laboratories UL 508, Standard for Industrial Control Equipment
- CSA certification available, file #LR58301 (not available for 300-400 amp service entrance or 100 amp load center models). Must be selected when the transfer switch is ordered.
- NFPA 70, National Electrical Code
- NFPA 110, Emergency and Standby Power Systems
- NEMA Standard IC10-1993, AC Automatic Transfer Switches

Specifications

Interface Module Specifications	
Load Control Contact Rating	10 A @ 250 VAC
Load Control Wire Size	#12-18 AWG
Controller Interface Connections A and B Wire Size	#20 AWG shielded twisted-pair Belden 9402 or 8723 or equivalent
Controller Interface Connections PWR and COM Wire Size	#12-20 AWG

Environmental Specifications	
Operating temperature	-20°C to 70°C (-4°F to 158°F)
Storage temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5 to 95% noncondensing

Cable Sizes						
AL/CU UL-Listed Solderless Screw-Type Terminals for External Power Connections						
Switch Size, Amps	Switch	Phases	Range of Wire Sizes, Cu/Al			
			Normal and Emergency	Load	Neutral	Ground
100	Standard	1	(1) #14 - 1/0 AWG	(1) #14 - 1/0 AWG	(3) #12 to 250 KCMIL (Cu) or (3) #10 to 250 KCMIL (Al)	(9) #4 - 14 AWG
	With load center	1	(1) #14 - 1/0 AWG	per customer-supplied circuit breaker	(1) #6 - 2/0 AWG	
	Service Entrance	1	Normal: (1) #12 - 2/0 AWG Emerg: (1) #6 - 250 MCM	(1) #6 - 250 MCM	(3) #12 to 250 KCMIL (Cu) or (3) #10 to 250 KCMIL (Al)	(3) #14 - 1/0 AWG
	3-Phase	3	(1) #8 - 3/0 AWG	(1) #8 - 3/0 AWG	(3) #6 AWG - 3/0 AWG	(3) #6 - 3/0 AWG
150 200	Service Entrance	1	Normal: (1) #4 - 300 MCM Emerg: (1) #6 - 250 MCM	(1) #6 AWG - 250 MCM	(3) #12 to 250 KCMIL (Cu) or (3) #10 to 250 KCMIL (Al)	(3) #14 - 1/0 AWG
200	Standard	1	(1) #6 AWG - 250 MCM	(1) #6 AWG - 250 MCM	(3) #12 to 250 KCMIL (Cu) or (3) #10 to 250 KCMIL (Al)	(9) #4 - 14 AWG
	3-Phase	3	(1) #6 AWG - 250 MCM	(1) #6 AWG - 250 MCM	(3) #4 AWG - 600 MCM (6) 1/0 - 250 MCM	(3) #6 - 3/0 AWG
300 400	Service Entrance	1	Normal: (1) #1 - 600 MCM or (2) #1 - 250 MCM Emerg: (2) #6 - 250 MCM	(2) #6 - 250 MCM	(3) #4 - 600 MCM (6) 1/0 - 250 MCM	(3) #6 - 3/0 AWG
400	Standard	1	(2) #6 - 250 MCM	(2) #6 - 250 MCM	(3) #4 - 600 MCM (6) 1/0 - 250 MCM	(3) #6 - 3/0 AWG
	3-pole 208-240 V	3				
	3 or 4 pole 480 V	3	(1) #4 - 600 MCM (2) #6 - 250 MCM	(1) #4 - 600 MCM (2) #6 - 250 MCM		

Note: Data is subject to change. Refer to the transfer switch dimension drawings and wiring diagrams for planning and installation.

Withstand and Close-On Ratings (WCR)

Service Entrance Transfer Switch Ratings

The service entrance transfer switch is factory-equipped with a normal source disconnect circuit breaker.

Suitable for control of motors, electric discharge lamps, tungsten filament lamps and electric heating equipment where the sum of motor full-load ampere ratings and the ampere ratings of other loads do not exceed the ampere rating of the switch and the tungsten load does not exceed 30 percent of switch rating.

Switch Rating, Amps *	WCR, RMS Symmetrical Amps at 240 VAC
100, 150, 200	22,000
300, 400	35,000
* Continuous load current not to exceed 80% of switch rating.	

Contactor Ratings with Coordinated Circuit Breakers

Single-phase transfer switches are UL listed at 240 VAC maximum. Three-phase transfer switches are rated at 480 VAC maximum. The following table lists contactor withstand current ratings (WCR) for 100–400 ampere non-service entrance rated switches with specific manufacturer's circuit breakers per UL and Canadian safety standards. Suitable for control of motors, electric discharge lamps, tungsten filament lamps and electric heating equipment where the sum of motor full-load ampere ratings and the ampere ratings of other loads do not exceed the ampere rating of the switch and the tungsten load does not exceed 30 percent of switch rating.

The transfer switch is rated for use on a circuit capable of delivering not more than the RMS symmetrical amperes maximum as shown in the tables below, but no greater than the interrupting capacity of the selected breaker.

WCR Ratings with Specific Manufacturer's Molded-Case Circuit Breakers						
Switch Rating, Amps	Voltage, max.	Number of Poles/ Phases	WCR, RMS Symmetrical Amps	Manufacturer	Type or Class	Maximum Size, Amps
100	240	2 pole/ 1 phase	10,000	Eaton/ Cutler-Hammer	FCL, FB, QCHW, GB, GHB, GC, GHC, GD, EHD	100
					FDB, FD, HFD, FDC, CA, CAH	150
				Square D	FI, FC, FA, FH	100
					QOM1, QOM1-VH	125
					Q2, Q2-H, Q2H	175
					QOM2, QOM2-VH	225
					QB, QD, QG, GJ	250
				Siemens	CED6, ED2, ED4, ED6, HED4, HED6, QP(Q2125), QPH(Q2125H)	125
					QJ2, QJH2	150
				GE	THQB, THQC, THHQB, THHQC	100
					THHQL, TQDL, THQDL	125
					SE, TQD, THQD, THED	150
				150 200	240	2 pole/ 1 phase
JD, JDB, HJD	225–250					
JDC	250					
DK, KD, KDB, HKD, KDC, LCL, LA	400					
Square D	Q2, QOM2, QOM2-VH, Q2-H, Q2H	225				
	KI, KA, KH, KC, QB, QD, QG, QJ	250				
	LE, LX, LXI, LC, LI, LA, LH	400				
Siemens	FD6-A, FXD6-A, HFD6, CFD6	250				
GE	TQDL, THQDL	125				
	THLC2	225				
	SF	250				


WCR Ratings with Specific Manufacturer's Molded-Case Circuit Breakers

Switch Rating, Amps	Voltage, max.	Number of Poles/ Phases	WCR, RMS Symmetrical Amps	Manufacturer	Type or Class	Maximum Size, Amps
100 200	480	3 pole/ 3 phase	30,000	Cutler-Hammer	FDC, HFD	150
					HJD, JDC	250
					HKD, KD, KDB, KDC, LA TRI-PAC, LCL	400
				Square D	FC, FI	100
					KC, KH, KI	250
					LA, LC, LE, LH, LI, LX, LXI	400
				ITE/Siemens	CED6, HED4, HED6	125
					CFD6, FD6, FXD6, HFD6	250
					CJD6, HJD6, HHJD6, HHJXD6, JD6, JXD6, SCJD6, SHJD6, SJD6	400
		GE		TB1	100	
				SEL, SEP, TEL, THLC1	150	
				TFL, THLC2	225	
				SFL, SFP	250	
				SGL4, SGP4, TB4, THJK4, THLC4, TJJ, TJK4, TLB4	400	
		300 400		240	1 phase	50,000
MDL, HMDL, NB	800					
Square D	LC, LI, LE, LX, LXI, DG, DJ, DL		600			
	LD, LXD, HLD, HLXD, HHL, HHLXD, CLD, NLGA, HLGA, LLGA, SLD, SHLD, SCLD		600			
ITE/Siemens	LMD, LMXD, HLMD, HLMXD, MD, MXD, HMD, HMXD, CMD, NMG, HMG, LMG, SMD, SHMD, SCMD		800			
	GE		SGHA, FGN, FGL, FGP			
Merlin Gerin	CJ600N, CJ600H		600			
ABB	T5, T6		600			
300 400	240	1 phase	50,000	If any of the following breakers is selected for application, the continuous load current must not exceed 80 percent of the switch rating:		
				Cutler-Hammer	DK, KDB, KD, CKD, HKD, CHKD, KDC, LCL, LA TRIPAC	400
		Square D			LA, LH, LC, LI, LE, LX, LXI	400
		ITE/Siemens		NJGA, HJGA, LJGA, JXD2, JD6, JXD6, HJD6, HJXD6, HHJD6, HHJXD6, CJD6, SJD6, SHJD6, SCJD6	400	
				Merlin Gerin	CJ400N, CJ400H, CJ400L	400

WCR Ratings with Specific Manufacturer's Molded-Case Circuit Breakers

Switch Rating, Amps	Voltage, max.	Number of Poles/ Phases	WCR, RMS Symmetrical Amps	Manufacturer	Type or Class	Maximum Size, Amps
400	480	3 pole/ 3 phase	50,000	Cutler-Hammer	HJD, JDC	250
					HKD, CHKD, KDC, LCL, LA TRIPAC	400
					HLD, CHLD, LDC, CLDC	300-600
					NB TRI-PAC	300-800
				Square D	KI, KC	250
					LI, LXI, LX, LE, LC	600
					MX, ME, MH	800
				ITE/Siemens	CFD6, HFD6	250
					CJD6, SCJD6, HHJD6, HHJXD6, SHJD6, HJD6	400
					CLD6, SCLD6, HHLD6, HHLXD6, SHLD6, HLD6	600
		CMD6, SCMD6, HMD6, SHMD6, HMXD6, MD6, MXD6, SMD6			800	
		GE		SFL, SFP, TFL, THLC2	250	
				SGL4, SGP4, TB4, THLC4, TLB4	400	
				SGL6, SGP6, TB6, TJL4V, TKL4V, TJL1S-6S	600	
				SKL8, SKP8, TB8, SKH8	800	
		Merlin Gerin		CF250L, CF250H	250	
				CJ400L, CK400H, CJ400H, CK400N	400	
				CJ600H	600	
				CK800H, CK800N	800	
		4 pole/ 3 phase				

Dimensions and Weights

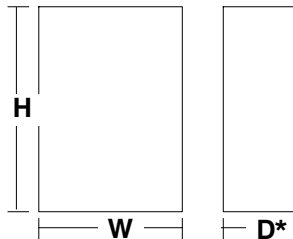


Amps	Description	Dimensions, H x W x D, mm (in.) †		Shipping Weight ‡	
		mm	(in.)	kg	(lb.)
100	Single phase	620 x 335 x 180	(24.4 x 13.2 x 7.1)	7	(15)
	With 12- or 16-space load center (NEMA 1)	610 x 330 x 154	(24.0 x 13.0 x 6.0)	12	(26)
	With 16-space load center	614 x 335 x 180	(24.2 x 13.2 x 7.1)	9	(20)
	Three phase	679 x 462 x 228	(26.7 x 18.2 x 9.0)	15	(34)
	Service entrance (ASE)	731 x 416 x 175	(28.8 x 16.4 x 6.9)	12	(26)
	Service entrance (CSE)	735 x 416 x 175	(28.9 x 16.4 x 6.9)	14	(30)
150-200	Service entrance (ASE)	731 x 416 x 175	(28.8 x 16.4 x 6.9)	14	(30)
	Service entrance (CSE)	735 x 416 x 175	(28.9 x 16.4 x 6.9)	16	(34)
200	Single phase	620 x 335 x 180	(24.4 x 13.2 x 7.1)	8	(17)
	Three phase	679 x 462 x 228	(26.7 x 18.2 x 9.0)	16	(35)
300	Service entrance	1067 x 559 x 329	(42.0 x 22.0 x 12.9)	59	(130)
400	Single phase	1067 x 559 x 329	(42.0 x 22.0 x 12.9)	50	(110)
	3-Pole/208-240 volts	1067 x 559 x 329	(42.0 x 22.0 x 12.9)	54	(120)
	3-Pole/480 volts	1222 x 610 x 343	(48.1 x 24.0 x 13.5)	68	(150)
	4-Pole	1222 x 610 x 343	(48.1 x 24.0 x 13.5)	73	(160)
	Service entrance	1067 x 559 x 329	(42.0 x 22.0 x 12.9)	59	(130)

† Depth does not include the padlock hasp on the front of the enclosure.

‡ Shipping weights are approximate and include packaging.

Note: Enclosures are type NEMA 3R except as noted.

Model Designation

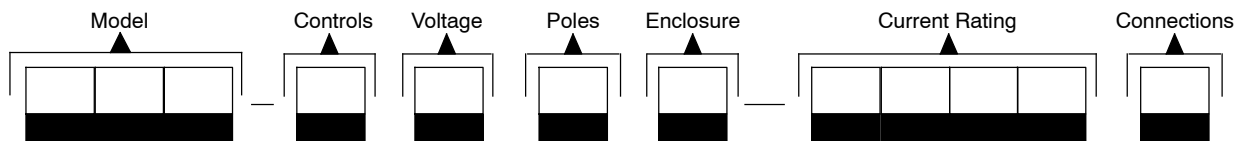

Record the transfer switch model designation in the boxes. The transfer switch model designation defines ratings and characteristics as explained below.

Sample Model Designation: RXT-JFNC-0200A

Model

RXT: Kohler Automatic Transfer Switch

Controls

J: Interface for RDC2/DC2 Controller

Voltage/Frequency

C: 208 Volts/60 Hz (3-phase only)

F: 240 Volts/60 Hz

M: 480 Volts/60 Hz (3-phase only)

Number of Poles/Wires

N: 2-pole, 3-wire, solid neutral (120/240 V only)

T: 3-pole, 4-wire, solid neutral

V: 4-pole, 4-wire, switched neutral

Enclosure

A: NEMA 1 *

C: NEMA 3R

* NEMA 1 enclosure is available on 100 amp load center models only.

Current Rating

0100: 100 amps

0150: 150 amps

0200: 200 amps

0300: 300 amps

0400: 400 amps

Connections

A: No load center

B: With load center (100 amp single-phase only)

ASE: Service entrance rated

CSE: Service entrance rated with CSA certification (100/150/200 amps only)

Available Models

All Model RXT transfer switches are standard-transition 60 Hz automatic transfer switches. Letters in parentheses refer to the model designation code described above.

Amps	Description (Connections)	Voltages			Poles	Phases	WCR § RMS Symmetrical Amps
		208 (C)	240 (F)	480 (M)			
100	Standard (A)		•		2 (N)	1	10,000
	Standard, with load center (B) ¶		•		2 (N)	1	10,000
	Standard, with load center **		•		2 (N)	1	10,000
	Service entrance (ASE, CSE)		•		2 (N)	1	22,000
	Standard, 3-phase	•	•	•	3 (T) or 4 (V)	3	30,000
150	Service entrance (ASE, CSE)		•		2 (N)	1	22,000
200	Standard (A)		•		2 (N)	1	10,000
	Service entrance (ASE, CSE)		•		2 (N)	1	22,000
	Standard, 3-phase (A)	•	•	•	3 (T) or 4 (V)	3	30,000
300	Service entrance (ASE)		•		2 (N)	1	35,000
400	Standard (A)		•		2 (N)	1	50,000
	Service entrance (ASE)		•		2 (N)	1	35,000
	Standard, 3-phase (A)	•	•	•	3 (T) or 4 (V)	3	50,000

§ Withstand and close-on rating. See pages 3-5 for WCR information and specific breaker ratings.

¶ With 16-space load center and NEMA 1 or NEMA 3R enclosure. Up to 8 tandem breakers can be used, for a maximum of 24 circuits.

** GM85273-SA_ with 12-space load center and NEMA 1 enclosure.

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator distributor for availability.

DISTRIBUTED BY: