

## PM2000

### Portable Generator

Model P0080900 UPC: 696471080322  
(EPA/49 ST/CSA)


### Features

- **POWERDIAL™ Recoil Start** (Off/Run/Cold Start) offers three operation settings integrated into one simple-to-use dial.
- **Large Capacity Steel Fuel Tank** provides durability and up to a 14 hour run-time at 25% load.
- **Powered by Generac 98cc OHV Engine** provides consistent power for multiple applications.
- **Ergonomic Frame** for easy portability.
- **Low-Oil Level Shutdown** prevents engine damage.
- **Fuel Gauge** allows users to keep track of gasoline levels.
- **Covered outlets** provide protection and keep out debris.



AC Maximum Output Starting Watts 2000  
AC Rated Output Running Watts 1400

### 49-State / CSA Control Panel

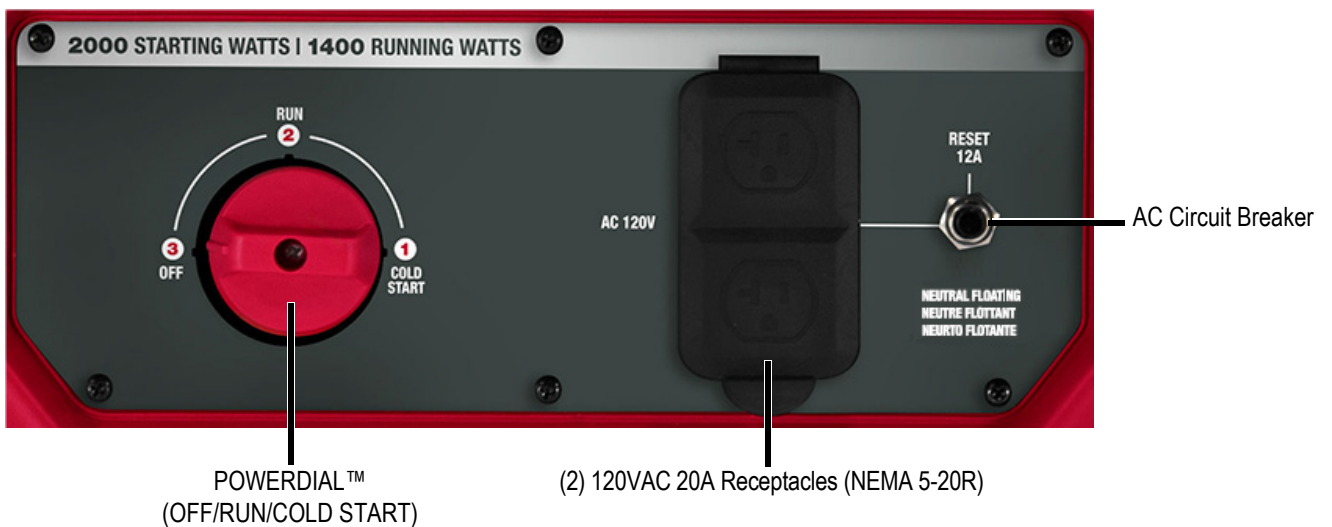

## PM2000

### Specifications

|                                  |                            |
|----------------------------------|----------------------------|
| Product Series                   | PM2000                     |
| Model (Configuration)            | P0080900 (EPA/49 ST/CSA)   |
| AC Maximum Output Starting Watts | 2000                       |
| AC Rated Output Running Watts    | 1400                       |
| Rated AC Voltage                 | 120 VAC                    |
| Rated AC Frequency               | 60 Hz                      |
| Rated 120 VAC Amperage           | 11.7                       |
| Engine Displacement              | 98cc                       |
| Engine Type                      | OHV                        |
| Engine RPM                       | 3600                       |
| Recommended Oil                  | 10W-30                     |
| Lubrication Method               | Splash                     |
| Choke Location                   | Integrated into POWERDIAL™ |
| Fuel Shut Off                    | On Fuel Tank               |
| Starting Method                  | Recoil Pull Start          |
| Low Oil Shutdown                 | Low Level                  |

|                                       |                  |
|---------------------------------------|------------------|
| Floating Neutral                      | Yes              |
| Start Switch Type                     | POWERDIAL™       |
| Start Switch Location                 | On Control Panel |
| Fuel Tank Capacity Gal (L)            | 2.25 (8.5)       |
| Run Time at 25% of Rated Load (Hours) | 14               |
| Run Time at 50% of Rated Load (Hours) | 10               |
| Warranty- Residential                 | 3 Year Ltd       |
| Warranty- Commercial                  | 90 Day           |

### Dimensions and Weights

|                          |              |
|--------------------------|--------------|
| Length in (mm)           | 19.7 (500)   |
| Width in (mm)            | 15.6 (395.5) |
| Height in (mm)           | 17 (431.3)   |
| Carton Length in (mm)    | 20.7 (525)   |
| Carton Width in (mm)     | 16.9 (430)   |
| Carton Height in (mm)    | 18.1 (460)   |
| Unit Weight lbs (kg)     | 62 (28.1)    |
| Shipping Weight lbs (kg) | 68 (30.8)    |

