

METER-RITE®

Grade-Level Meter Socket with Circuit Breaker Combo Unit


Catalog Number: MSB200L

TYPE 3R Rainproof Enclosure 240 Vac
Suitable Only for Use as Service Equipment

Short Circuit Current Rating Of This Panelboard Is 25,000 RMS Symmetrical Amperes, 240 VAC Max, But The Rating Is Limited To The Lowest Interrupting Rating Capacity At A Supply Voltage Of Any Breaker Installed. The Replacement Circuit Breakers Must Be Of The Same Type And Interrupt Ratings.

200 AMP 240 VOLT SINGLE-PHASE SERVICE LINE

Note: L = Lever Bypass

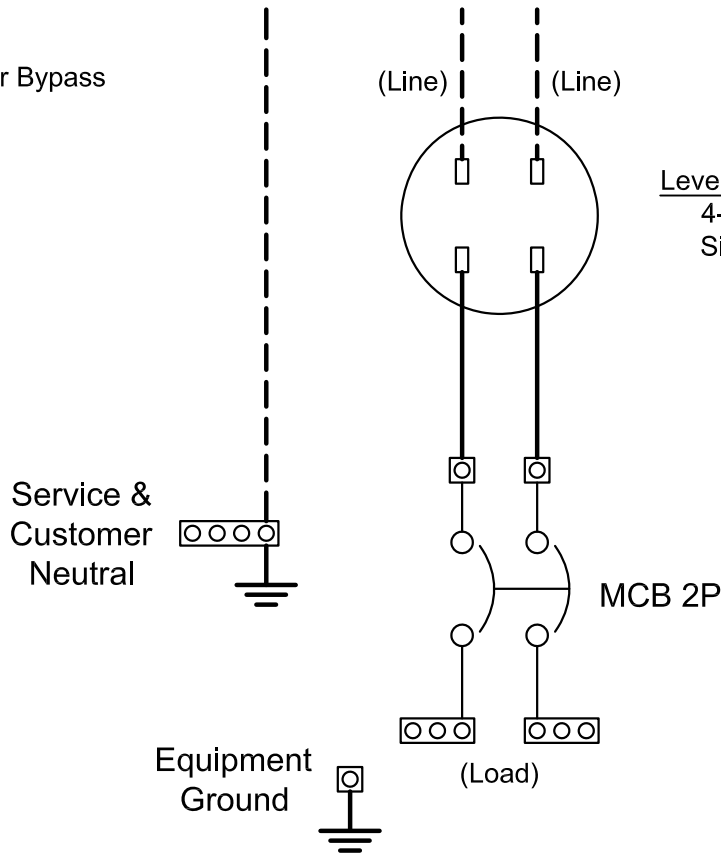

Schematic for Catalog Number
MSB200L

RONK ELECTRICAL INDUSTRIES, INC.
NOKOMIS, ILLINOIS

Drawing Number

2-5577

Scale None

Drawn NCL

Date 2/16/17

Approved NCL

Lever Bypass: 200 Amp Meter Socket
4-Pin Type For 240 Volt
Single-Phase Service

SWITCH CATALOG NUMBER	SERVICE		CUSTOMER
	LINE LUGS	NEUTRAL	LOAD LUGS
MSB200L	350 MCM - #6 (LAY IN TERMINAL)	350 MCM - #6 (4-HOLE BAR)	350 MCM - #6 (3-HOLE BAR)

TIGHTENING TORQUE	
SOCKET SIZE (INCH)	TORQUE (IN-LB)
1/8	45
5/32	100
3/16	120
7/32	150
1/4	200
5/16	250
3/8	375
1/2	500
9/16	600

USE COPPER WIRE RATED 75° C FOR LOAD CONNECTIONS.

Revision Description
Changed wording of SCCR.

Rev CN 0196
Date 02/22/19
BY NCL
C