

# iGen4500

## 4500 Watt Digital Inverter Gasoline Portable Generator

3700 Running Watts | 4500 Peak Watts



Fuel efficient, 3.4 gallon fuel tank that runs 16 hrs at 25% load

Two 5V USB ports for charging sensitive electronics such as phones or tablets

Push button electric start

RV and camper ready with TT-30R outlet

Telescoping handle for easy transportation

Remote start key fob included for starting and stopping generator up to 109 yards away

<3% THD  
SINE WAVE OUTPUT

Parallel capable with another iGen using a Westinghouse 50A parallel cord (additional iGen and cord sold separate)

Double-insulated acoustic enclosure and low tone mufflers to reduce operating noise




Dependable 7.3 HP 224cc OHV 4-Stroke Westinghouse engine

### What Comes in the Box



### LED Data Center

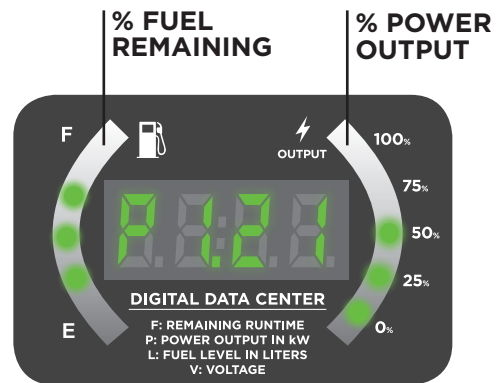

### AUTOMATIC ROTATING DIGITAL DISPLAY



# iGen4500

## Inverter Generator Specifications



Gasoline Peak Watts	4500
Gasoline Running Watts	3700
Peak Amps at 120V	37.5 amps
Running Amps at 120V	30.8 amps
AC Voltage	120 Volts
DC Voltage	5 Volts
AC Frequency	60 Hz
Parallel Capable with 50A Westinghouse Cord (sold separate)	Yes
Engine Horse Power (HP)	7.3 HP
Total Harmonic Distortion (THD)	<3%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Electric, Remote, Recoil
Battery Included	Yes
Battery Charger Included	Yes
Remote Start Fob Included	Yes (paired at factory)
Remote Start Distance (yards/meters)	109 yd. (100 m.)
Engine Displacement	224cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine Speed	Variable
Engine RPM	Max 3600
Operational Volume at 25% Load	62 dBA
Operational Volume at 50% Load	65 dBA
Spark Plug (included)	Torch F7RTC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140540
Economy Mode Switch	Yes
Built-in Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.6 qt. (20.3 oz.)
Oil Capacity (Quarts/Ounces)	.6 qt. (20.3 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual

Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	3.4 gal. (12.8 L)
Run Time at %25 Load (hrs.)	16 hrs.
Run Time at %50 Load (hrs.)	13 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Automatic
AC Outlets	(1) 120V 30A (TT-30R) (1) Duplex 120V 20A (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Floating Neutral
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready	No
GFCI Outlets	No
LED Data Center	Yes
RV Ready Outlet	Yes
Overload Protection (circuit breaker)	Yes
Handle Style	Telescoping Handle
Emissions	EPA, CARB
Canada CSA Compliant	No
Wheel Kit Included	Yes (already assembled)
Wheel Size	5.5 in. Diameter, 1.5 in. Thick
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years or 1000 hrs.
Commercial Warranty	6 Months or 1000 hrs.
Assembled Length in. (mm)	24.5 in. (622 mm)
Assembled Width in. (mm)	17.5 in. (445 mm)
Assembled Height in. (mm)	20 in. (508 mm)
Carton Length in. (mm)	30 in. (758 mm)
Carton Width in. (mm)	19.5 in. (495 mm)
Carton Height in. (mm)	21 in. (540 mm)
Dry Unit Weight lb. (kg)	104.7 lb. (47.5 kg)
Shipping Weight lb. (kg)	112.5 lb. (51 kg)
UPC	855464003902
GTIN	00855464003902

09212017KD\_NCSA  
 ©2017 Westinghouse Portable Power  
 Specifications are subject to change without notice  
 Westinghouse Portable Power  
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team  
 at [service@wpowereq.com](mailto:service@wpowereq.com) or call  
 855.944.3571**

