

iGen4500DF

4500 Watt Digital Inverter

Dual Fuel (Gas/LPG) Portable Generator

Gas: 3700W Running 4500W Peak | Propane: 3330W Running 4050W Peak



50 State and
Canada Model



Fuel efficient, 3.4 gallon
fuel tank that runs 18 hrs (gas)
at 25% load

Two 5V USB ports for charging
sensitive electronics such as
phones or tablets

RV and camper ready with
TT-30R outlet

Push button electric start

Telescoping handle for easy
transportation

Remote start key fob included for
starting and stopping generator

Dependable 7.3 HP 224cc OHV
4-Stroke Westinghouse engine

<3% THD
SINE WAVE OUTPUT


Parallel capable with another iGen
using a Westinghouse parallel cord
(additional iGen and cord sold separate)

Double-insulated acoustic
enclosure and low tone mufflers
to reduce operating noise

What Comes in the Box



LED Data Center

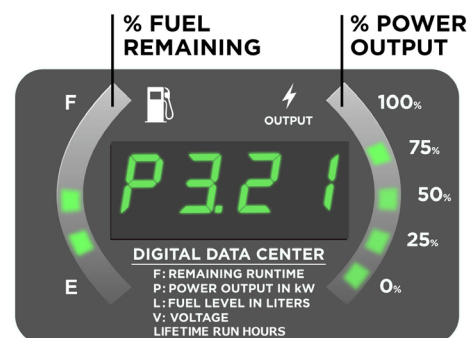

AUTOMATIC ROTATING DIGITAL DISPLAY



iGen4500DF

Inverter Generator Specifications



Gasoline Peak Watts	4500
Gasoline Running Watts	3700
Peak Amps at 120V	38 amps
Running Amps at 120V	31 amps
Propane Running Watts	3330
Propane Peak Watts	4050
Propane Running Amps	28 amps
Propane Peak Amps	34 amps
AC Voltage	120 Volts
DC Voltage	5 Volts
AC Frequency	60 Hz
Parallel Capable with 50A Westinghouse Cord (sold separate)	Yes
Engine Horse Power (HP)	7.3 HP
Total Harmonic Distortion (THD)	<3%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Electric, Remote, Recoil
Battery Included	Yes
Battery Charger Included	No
Remote Start Fob Included	Yes (paired at factory)
Remote Start Distance (yards/meters)	109 yd. (100 m.)
Engine Displacement	224cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine Speed	Variable
Engine RPM	Max 3600
Operational Volume	as low as 52 dBA
Spark Plug (included)	Torch F7RTC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140569
Altitude DF Regulator Kit Number (sold separate)	140563
Economy Mode Switch	Yes
Built-in Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.6 qt. (20.3 oz.)
Oil Capacity (Quarts/Ounces)	.6 qt. (20.3 oz.)
Low Oil Shutdown	Automatic

Fuel Type	Propane, Unleaded Gasoline - 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	3.4 gal. (12.8 L)
Gas - Run Time at %25 Load (hrs.)	18 hrs.
Gas - Run Time at %50 Load (hrs.)	15 hrs.
Propane - Run Time at 25% Load (hrs.) With 20 lb. Standard Propane Tank	14 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Automatic
AC Outlets	(1) 120V 30A (TT-30R) (1) Duplex 120V 20A (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Floating Neutral
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready	No
Volt Meter	Yes
GFCI Outlets	No
LED Data Center	Yes
RV Ready Outlet	Yes
Overload Protection (circuit breaker)	Yes
Handle Style	Telescoping Handle
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Wheel Kit Included	Yes (assembled)
Wheel Size	5.5 in. Diameter, 1.5 in. Thick
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in. (mm)	24.5 in. (622 mm)
Assembled Width in. (mm)	17.5 in (445 mm)
Assembled Height in. (mm)	20.5 in. (520 mm)
Handle Extended Length in. (mm)	46 in (1,168 mm)
Carton Length in. (mm)	30 in (762 mm)
Carton Width in. (mm)	19.5 in. (495 mm)
Carton Height in. (mm)	21 in. (533 mm)
Dry Unit Weight lb. (kg)	98 lb. (44 kg)
Shipping Weight lb. (kg)	105 lb. (48 kg)
UPC	855464003704
GTIN	00855464003704

11122018KD
 ©2018 Westinghouse Outdoor Power Equipment
 Specifications are subject to change without notice
 Westinghouse Portable Power
 777 Manor Park Dr., Columbus, OH 43228

