




**WILDCAT**  
POWER GEN

**PROVIDING  
BETTER POWER**

## ROUGHNECK DIESEL: 60KW

The Roughneck generator was designed with rugged simplicity in mind. Three phase, open skid or enclosed packages designed for emergency applications but built to run for extended power outage periods of time on prime rated liquid cooled engine platforms.

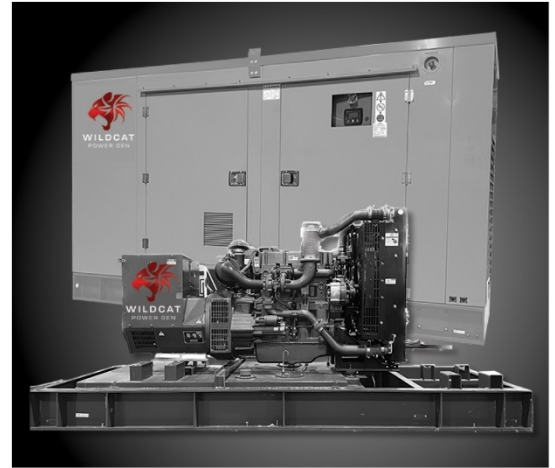

### Durable Industrial Engine

- Planned for emergency applications but built for industrial applications, the Roughneck's power plant is a premier industrial fixed speed (1,800 RPM) engine built to provide strong, reliable power without sacrificing engine longevity.

### Quality Clean Power

- Voltage regulation ensures that electronics are safely powered with less 5% total harmonic distortion (THD) at no load.

### NFPA-110

- Wildcat designed the Roughneck to exceed NFPA-110, Level 2 Emergency Power Supply Systems (EPSS) by providing prime power (PP) to meet EPSS Class 168 Type 10.

### Digital Controls

- Designed for single genset applications, the Roughneck's digital controls monitor the genset's voltage, current, power, frequency, engine speed, oil pressure and coolant temperature on a back-lit LCD display for ease of use.

### Industrial Class Alternator

- Protected with Class H insulation and standard 40°C nominal rating, the Roughneck's standard 12-wire winding and 2/3 pitch meet all key international standards and regulations including UL 1446.

### Easy to Service

- Preventative maintenance and in-field repairs are made easier with our simplified engineering and non-proprietary parts.

## GENERATOR SET RATING

Model	Voltage	Power Factor	Phase	Hz	Circuit Breaker Amps	kW / kVA	BMEP (Bar)	BSFC (g/hp*hr)	Emission Compliance	Controller
Roughneck Diesel 49KW RO0049D3A*XE	120 / 240	1.0	1	60	250	56 / 56	14.6	162	Tier 3	DeepSea
Roughneck Diesel 60KW RO0060D3B*XE	208 / 110	0.8	3	60	225	60 / 75	14.6	162	Tier 3	DeepSea
Roughneck Diesel 60KW RO0060D3C*XE	240 / 120	0.8	3	60	200	60 / 75	14.6	162	Tier 3	DeepSea
Roughneck Diesel 60KW RO0060D3D*XE	480 / 277	0.8	3	60	100	60 / 75	14.6	162	Tier 3	DeepSea



**ENGINE SPECIFICATIONS**

**Engine**

Manufacturer	KOEL
Type	4R810TA1 Powertrain 4 Cycle, Turbo Charged & Charge Air Cooled
Speed (RPM)	1800
Cylinder Arrangement	Inline 4
Displacement (L / cc)	3.2L / 3240cc
Bore & Stroke (in / mm)	3.779" x 4.409" / 96 x 112
Compression Ratio	16.5:1
Governor Type	Electronic
Frequency Regulation Steady State	+/- 0.25%
Frequency Regulation No-load to Full-load	Isochronous, Constant Speed
Air Filter Type	Dry
Limited Warranty	3 Years, 5,000 Hours

**Lubrication System**

Type	Full Pressure
Oil Capacity (qt / L)	12qt / 11.5 L
Oil Filter (Quantity / Type)	1/Spin-On

**Cooling System**

Radiator Type	Aluminum
Fan Type	Pusher

**Sound Rating at 7 Meters, Lowest Side**

No Load	72 dB(A)
---------	----------

**Engine Crankcase Vent System**

Engine Crankcase Vent System	Closed Crankcase Vent
------------------------------	-----------------------

**Electrical System**

Battery Quantity	1
Battery Voltage (VDC)	12
Battery CCA (A)	900
Battery Charging Alternator	
Ground (Negative/Positive)	Negative
Voltage (VDC)	12
Amperage (A)	32
Starter Motor Voltage (VDC)	12

**Exhaust System**

Exhaust Manifold Type	Dry
Exhaust Flow at Rated Load (gal/hr)	95.1
Exhaust Temperature at Rated Load (°F / °C)	1256 / 680
Maximum Allowable Back Pressure (in Hg / kPa)	2.95 / 10.0±1.0

**Fuel System**

Fuel Type	Ultra-Low Sulfur Diesel
Fuel Injection Pump	Mechanical Fuel Inline Pump
Fuel Filter	0.6 liter Single bowl Spin-on
Ignition System	Direct Injection

**Fuel Consumption**

<b>Optional Fuel Tank Capacity: 140 Gallons – 24 Hour Run Time</b>	
Full Load:	4.94 GAL / HR
50% Load:	2.51 GAL / HR
No Load:	1.00 GAL / HR

**STANDARD CONTROLLER**



**WILDCAT POWER GEN  
DeepSea Controller**

- User-friendly control panel for troubleshooting
- Conveniently monitors diagnostic conditions, displays system fault codes and sets weekly exercise cycle
- Easy-to-read alpha-numeric scrolling display
- Single & 3 Phase generator applications
- UL recognized

**Engine Output Deratings**

Rated Temperature (°F / °C)	77 / 25
Rated Altitude	328 ft (100 m) Above Sea Level
Temperature Derate	1.5% for Each 10°F (5.6°C) Above Rated Temperature
Altitude Derate	2.5% for Each 1000 ft (305 m) Above Rated Altitude



## ALTERNATOR SPECIFICATIONS

	Roughneck 49KW Single Phase Tier 3	Roughneck 60KW 3-Phase Tier 3	Roughneck 60KW 3-Phase Tier 3	Roughneck 60KW 3-Phase Tier 3
<b>Model</b>	RO0049D3A*XE	RO0060D3B*XE	RO0060D3C*XE	RO0060D3D*XE
<b>Alternator Model</b>	UCI224F	UCI224F	UCI224F	UCI224F
<b>Manufacturer</b>	Stamford	Stamford	Stamford	Stamford
<b>Type</b>	Brushless, 12-Lead	Brushless, 12-Lead	Brushless, 12-Lead	Brushless, 12-Lead
<b>Frequency (Hz)</b>	60	60	60	60
<b>Phase</b>	1	3	3	3
<b>Winding Configuration</b>	Double Delta	Parallel Star	Series Delta	Series Star
<b>Exciter Type</b>	Self Exciter	Self Exciter	Self Exciter	Self Exciter
<b>Number of Poles</b>	4	4	4	4
<b>Voltage Regulator</b>	MX341UL	MX341UL	MX341UL	MX341UL
<b>Insulation Rating</b>	Class H	Class H	Class H	Class H
<b>Designed Temperature Rise Limit</b>	125 °C	125 °C	125 °C	125 °C
<b>Bearing (Quantity / Type)</b>	1/Sealed	1/Sealed	1/Sealed	1/Sealed
<b>Coupling</b>	Flexible Disk	Flexible Disk	Flexible Disk	Flexible Disk
<b>Amortisseur Windings</b>	Full	Full	Full	Full
<b>Voltage Regulation, NL to FL</b>	+/- 1.0%	+/- 1.0%	+/- 1.0%	+/- 1.0%
<b>One Step Load Acceptance</b>	100% ofRating	100% ofRating	100% ofRating	100% ofRating
<b>Total Harmonic Distortion (THD), NL to FL</b>	<5%	<5%	<5%	<5%

- Complete winding protection for non-harsh environment with relative humidity ≤95%. IP23 Protection
- Manufactured according to the following standards: ISO 3046, ISO 8528-1, ISO 8528-3, ISO 8528-5, IEC 60034-1, BS 5000-3

## Weight & Dimensions

**Assembled Weight (lbs / kg)** 3353 LBS / 1512 KG

**Overall Dimensions (in / mm)** 108.78" L x 41.78" W x 71.34" H 2763mm L x 1061mm W x 1812mm H

Need help? Visit [wildcatpowergen.com](http://wildcatpowergen.com)

Complete the web form and a local dealer will contact you to answer questions on our generators and accessories.

**620-500-5111**

**Never Lose Power Again  
With Wildcat Power Gen**