

## FEATURES

### FPT N67 TM1 Engine

FPT Industrial (a division of Case/New Holland Industrial) is a leading manufacturer of engines for industrial applications backed by an extensive service network.

### Deep Sea 7310 MKII Controller

Digital controller providing immediate performance information and safety shutdowns.

### Stamford Generator End

Alternators built to produce clean power for industrial applications.

### Powder Coat Paint

Incredibly durable and long lasting finish.

### Block Heater

In-line Kim Hotstart, 120V, block heater with thermostat.

### Battery Charger

Guest 2 Amp charger standard.

### UL2200 Listed

A safety standard for the design, construction, and performance of stationary generators.

### 100% Load Tested

We load test every generator before it leaves our facility.

## WINPOWER® INDUSTRIAL DIESEL SERIES



Shown with optional enclosure and fuel tank

## OPTIONAL ACCESSORIES

### Sub-Base Fuel Tank

UL142 double wall steel fuel tank with stub up area allows for a clean installation with minimal footprint.

### WEBNET

Control your generator from your smart phone or computer.

### Enclosure

14 gauge galvaneal steel with internal baffling and 1" foam for sound attenuation and weather protection.

### Battery Charger

A marine grade, 2 Amp charger is standard with the possibility to upgrade to a DSE 5 or 10 Amp charger.

### BCI 31 900 CCA Battery

Interstate BCI 31 900 CCA

## GENERATOR SET

OUTPUT	WATTS	KVA	AMPS	CB
				AMPS
120/240V 1-PH, 1.0 PF	100,000	100	416	400
120/208V 3-PH, 0.8 PF	105,000	131	364	350
120/240V 3-PH, 0.8 PF	105,000	131	315	300
277/480V 3-PH, 0.8 PF	115,000	143	172	175
SOUND DATA <sup>(1)</sup>				76

CERTIFICATION UL2200 LISTED

NOTE: (1) Measurement is in db(a). Tested at 7 meters (23ft) with housing.

## ALTERNATOR

RATING	(125/40°C) STANDBY
VOLTAGE REGULATION	+/- 1.5%
TOTAL HARMONIC DISTORTION	< 5%
TYPE	4 POLE REVOLVING FIELD
BRUSHLESS	YES
GENERATOR SPEED	1800 RPM
VOLTAGE CONTROL	SX460 EXTERNAL EXCITATION
ROTOR	2/3 PITCH
WINDINGS	100% COPPER
TELEPHONE INTERFERENCE	< 2.0%
EFFICIENCY PEAK	~ 93.5%
COUPLING	FLEXIBLE DISC
SINGLE PHASE	4 LEADS
3 PHASE	12 LEADS
BEARINGS	1 MAINTENANCE FREE
INSULATION	CLASS H
GENERATOR WARRANTY <sup>(1)</sup>	1 YR/1000 HRS

NOTES: (1) Standby only. For more generator warranty information contact your local WINCO dealer.

## DERATING FACTORS

TEMPERATURE > 104°F	3% PER 10°F
ALTITUDE	3% EVERY 300M AFTER 1000M
PRIME POWER	20%
MAX OPERATING TEMP	122°F/50°C

## BATTERY

DC SYSTEM VOLTAGE	12V
BATTERY CHARGER	2 AMP
BATTERY RACK/CABLE	INCLUDED
REQUIRED BATTERY <sup>(1)</sup>	GROUP 31 900 CCA

Notes: (1) Battery not included

## ENGINE

BRAND	FPT
MODEL	N67 TM1
SPEED	1800 RPM
EPA	TIER III
TYPE	DIESEL
GROSS HP (STANDBY)	201
BORE x STROKE	4.09" x 5.2"
GOVERNOR	MECHANICAL
CYLINDERS	6
TOTAL DISPLACEMENT	6.7 L
ASPIRATION	TURBOCHARGED/AFTERCOOLED
EXHAUST OUTLET <sup>(1)</sup>	5"
ALTERNATOR	90 AMPS
OIL & FILTER REPLACEMENT	800 HRS
RECOMMENDED OIL <sup>(2)</sup>	10W 30
OIL CAPACITY	17.9 QT
FLYWHEEL (TEETH 125)	11.5"
COLD STARTING	
W/O PREHEATING	5°F (-15°C)
W/ PREHEATING	-13°F (-25°C)
ENGINE WARRANTY <sup>(3)</sup>	5 YRS/2000 HRS

NOTES: (1) Muffler ships loose. (2) This oil is recommended for most applications. See Operator's Manual for more details on the appropriate oil type for your needs.

(3) Standby, for more engine warranty information contact your local FPT dealer.

## BLOCK HEATER

VOLTS	120
WATTS	1,000
THERMOSTAT	
ON	100°F
OFF	120°F

## TANK OPTIONS

230 GALLON UL142	108" x 48" x 21"
415 GALLON UL142	108" x 48" x 36"

## FUEL

FUEL TYPE	DIESEL
FUEL CONSUMPTION	
100% LOAD	7.71 GAL/HR
50% LOAD	4.67 GAL/HR

## SHIPPING

DIMENSIONS OPEN	108" x 48" x 52.75"
NET WEIGHT OPEN	3,400 LBS
DIMENSIONS ENCLOSED	137" x 50.73" x 80.14"
NET WEIGHT ENCLOSED	5,050 LBS
FREIGHT CLASS	70

## DSE 7310 MKII CONTROLLER


ENGINE DISPLAY	
ENGINE RPM	YES
LOW OIL PRESSURE	YES
HIGH COOLANT TEMP	YES
LOW COOLANT	OPTIONAL
LOW OIL TEMP	OPTIONAL
OVER/UNDER SPEED	YES
OVER CRANK	YES
CHARGING ALT FAILURE	YES
CAN ECU SHUTDOWN	YES
GENSET DISPLAY	
VOLTAGE (L-N & L-L)	YES
OVER/UNDER VOLTAGE	YES
FREQUENCY	YES
OVER/UNDER FREQUENCY	YES
AMP DISPLAY/SHUTDOWN	YES
PHASE IMBALANCE	DISABLED
KW, KVA, KVAR, PF DISPLAY	YES
KWH, KVAH, KVARH, DISPLAY	YES
GENERATOR PHASE SEQUENCE	OPTIONAL
EARTH CURRENT	OPTIONAL

ADDITIONAL DISPLAYS/PROTECTIONS	
EMERGENCY STOP	YES
FUEL LEAK/SENDER FAILURE	YES
BATTERY OVER/UNDER VOLTAGE	YES
BATTERY CHARGER FAILURE	OPTIONAL
COMMUNICATIONS	
USB CONNECTABLE	YES
RS232/RS485	YES
NFPA ANNUNCIATOR	10XDSE 2548 OPTIONAL
REMOTE DISPLAY PANEL	3XDSE 2510 OPTIONAL
DSE850 WEBNET	OPTIONAL
ADDITIONAL FEATURES	
AUDIBLE ALARM	YES
ENGINE EXERCISER	YES
MAINTENANCE INTERVAL TIMER	OPTIONAL
LOAD SHEDDING/ DUMMY	OPTIONAL
CONFIGURABLE INPUTS	9-24 W/DSE 2130 OPTIONAL
CONFIGURABLE OUTPUTS	6-80 W/DSE 2751 OPTIONAL
EVENT LOG	YES
ALTERNATIVE CONFIGURATIONS	3
UL/CSA LISTED	YES



DSE 7310 MKII

OPEN SKID

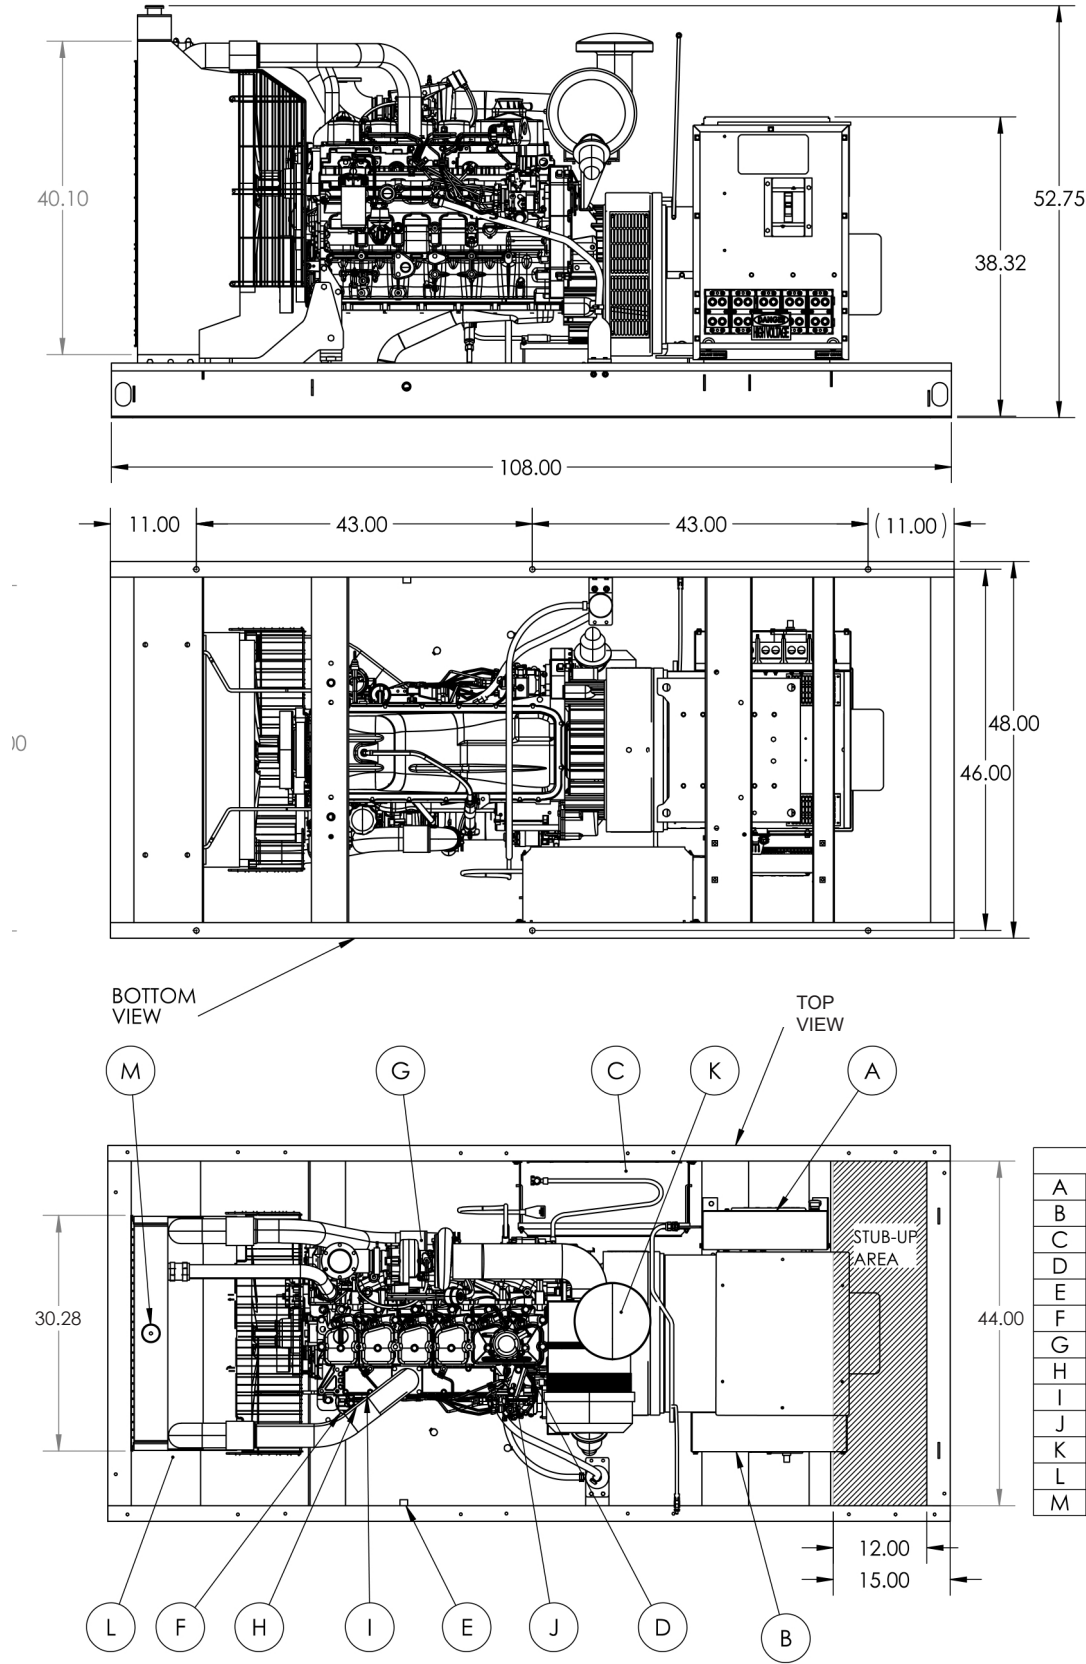

Key Components	
A	ENGINE CONTROL
B	MAIN LINE CIRCUIT BREAKER
C	START BATTERY
D	OIL FILL
E	OIL DRAIN
F	OIL DIPSTICK
G	OIL FILTER
H	FUEL FILTER
I	FUEL IN
J	FUEL RETURN
K	AIR FILTER
L	COOLANT DRAIN
M	COOLANT FILL

Technical drawings of the Winpower 230 and 415 gallon double wall tanks.

**Left Drawing (Front Elevation):**

- Shows a tank with a "WINPOWER" logo.
- Indicates a "REQUIRED DOOR SWING BOTH SIDES".
- Dimensions: 33.00 (width of door area) and 48.00 (width of main tank body).

**Right Drawing (Side Elevation):**

- Shows the tank profile with a "WINPOWER" logo.
- Indicates a vent with a diameter of  $\varnothing 5.00$ .
- Dimensions:
  - 136.93 (total width)
  - 72.07 (height to top of 230 gallon section)
  - 28.00 (width to door)
  - 8.14 (height to top of 230 gallon section)
  - 80.14 (height to top of 415 gallon section)
  - 101.14 (height to top of 415 gallon section)
  - 116.14 (height to top of 415 gallon section)
- Labels: "230 GALLON DOUBLE WALL" and "415 GALLON DOUBLE WALL".

**SP-172/D • DR100F4**