

Model: **38RCL**

KOHLER Power Systems

**Multi-Fuel
LPG/Natural Gas**

ISO 9001
KOHLER
POWER SYSTEMS
NATIONALLY REGISTERED



The Kohler® Advantage

- **High Quality Power**
Kohler home generators provide advanced voltage and frequency regulation along with ultra-low levels of harmonic distortion for excellent generator power quality to protect your valuable electronics.
- **Extraordinary Reliability**
Kohler is known for extraordinary reliability and performance and backs that up with a premium 5-year or 2000 hour limited warranty.
- **All-Aluminum Sound Enclosure**
- **Fast Response**
Kohler's Fast-Response™ II excitation system delivers excellent voltage response and short-circuit capability using a permanent magnet (PM)-excited alternator.
- **Quiet Operation**
Kohler home generators provide quiet, neighborhood-friendly performance.
- **Standard Features**
 - Kohler Co. provides one-source responsibility for the generating system and accessories.
 - The generator set and its components are prototype-tested, factory-built, and production-tested.
 - The generator set accepts rated load in one step.
 - A standard five-year limited warranty covers all systems and components.
 - Quick-ship (QS) models with selected features are available. See your Kohler distributor for details.
 - RDC2 Controller
 - One digital controller manages both the generator set and transfer switch functions (with optional Model RXT ATS).
 - Designed for today's most sophisticated electronics.
 - Electronic speed control responds quickly to changing demand.
 - Digital voltage regulation protects your valuable electronics from harmonic distortion and unstable power quality.
 - Engine Features
 - Powerful and reliable GM 4.3 L liquid-cooled engine
 - Electronic engine management system.
 - Simple field conversion between natural gas and LP vapor fuels while maintaining emission certification.
 - Innovative Cooling System
 - Electronically controlled fan speeds minimize generator set sound signature.
 - Approved for stationary standby applications in locations served by a reliable utility source.
 - Certifications
 - The 60 Hz generator set engine is certified by the Environmental Protection Agency (EPA) to conform to the New Source Performance Standard (NSPS) for stationary spark-ignited emissions.
 - UL 2200 listing is available (60 Hz only).
 - CSA certification is available (60 Hz only).
 - Accepted by the Massachusetts Board of Registration of Plumbers and Gas Fitters.

Generator Set Ratings

| Alternator | Voltage | Ph | Hz | Standby Ratings | | | |
|------------|----------|----|----|-----------------|------|--------|------|
| | | | | Natural Gas | | LPG | |
| | | | | kW/kVA | Amps | kW/kVA | Amps |
| 4P5 | 120/208 | 3 | 60 | 39/49 | 135 | 39/49 | 135 |
| | 127/220 | 3 | 60 | 39/49 | 128 | 39/49 | 128 |
| | 120/240 | 3 | 60 | 39/49 | 117 | 39/49 | 117 |
| | 277/480 | 3 | 60 | 39/49 | 58 | 39/49 | 58 |
| | 220/380* | 3 | 50 | 31/39 | 59 | 31/39 | 59 |
| | 230/400 | 3 | 50 | 31/39 | 56 | 31/39 | 56 |
| 4Q5 | 240/416* | 3 | 50 | 31/39 | 54 | 31/39 | 54 |
| | 120/240 | 1 | 60 | 38/38 | 158 | 38/38 | 158 |

* 50 Hz models are factory-connected as 230/400 volts. Field-adjustable to 220/380 or 240/416 volts by an authorized service technician.

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor. *Standby Ratings:* Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads with an average load factor of 80% for the duration of a power outage. No overload capacity is specified for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. *GENERAL GUIDELINES FOR DERATING:* *Altitude:* Derate 1.3% per 100 m (328 ft.) elevation above 200 m (656 ft.). *Temperature:* Derate 3.0% per 10°C (18°F) temperature above 25°C (77°F). Availability is subject to change without notice. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler generator distributor for availability.

Alternator Specifications

| Specifications | Alternator |
|--|-------------------------------|
| Manufacturer | Kohler |
| Type | 4-Pole, Rotating Field |
| Exciter type | Brushless, Permanent Magnet |
| Leads: quantity, type | |
| 4Q5 | 4, 120/240 |
| 4P5 | 12, Reconnectable |
| Voltage regulator | Solid State, Volts/Hz |
| Insulation: | NEMA MG1 |
| Material | Class H |
| Temperature rise | 130°C, Standby |
| Bearing: quantity, type | 1, Sealed |
| Coupling | Flexible Disc |
| Amortisseur windings | Full |
| Voltage regulation, no-load to full-load | ± 1.0% RMS |
| Unbalanced load capability | 100% of Rated Standby Current |
| One-step load acceptance | 100% of Rating |
| Peak motor starting kVA: | (35% dip for voltages below) |
| 480 V, 380 V 4P5 (12 lead) | 140 (60 Hz), 98 (50 Hz) |
| 240 V 4Q5 (4 lead) | 95 (60 Hz) |

- Fast-Response™ II brushless alternator with brushless exciter for excellent load response.
- Brushless, rotating-field alternator.
- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and dripproof construction.
- Windings are vacuum-impregnated with epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.
- Total harmonic distortion (THD) from no load to full load with a linear load is less than 4%.

Application Data

Engine

| Engine Specifications | 60 Hz | 50 Hz |
|--|--|-----------|
| Manufacturer | General Motors | |
| Engine: model, type | Industrial Powertrain Vortec 4.3 L, 4-Cycle Natural Aspiration | |
| Cylinder arrangement | V-6 | |
| Displacement, L (cu. in.) | 4.3 (262) | |
| Bore and stroke, mm (in.) | 101.6 x 88.4 (4.00 x 3.48) | |
| Compression ratio | 9.05:1 | |
| Piston speed, m/min. (ft./min.) | 318 (1044) | 265 (870) |
| Main bearings: quantity, type | 4, Babbitt | |
| Rated rpm | 1800 | 1500 |
| Max. power at rated rpm, kW (HP) | 56 (75) | 44.8 (60) |
| Cylinder head material | Cast Iron | |
| Piston type and material | High Silicon Aluminum | |
| Crankshaft material | Nodular Iron | |
| Valve (exhaust) material | Forged Steel | |
| Governor type | Electronic | |
| Frequency regulation, no-load to full-load | Isochronous | |
| Frequency regulation, steady state | ±1.0% | |
| Frequency | Fixed | |
| Air cleaner type | Dry | |

Engine Electrical

| Engine Electrical System | |
|--|------------|
| Ignition system | Electronic |
| Battery charging alternator: | |
| Ground (negative/positive) | Negative |
| Volts (DC) | 12 |
| Ampere rating | 70 |
| Starter motor rated voltage (DC) | 12 |
| Battery, recommended cold cranking amps (CCA): | |
| Qty., rating for -18°C (0°F) | One, 630 |
| Battery voltage (DC) | 12 |
| Battery group size | 24 |

Exhaust

| Exhaust System | 60 Hz | 50 Hz |
|---|-------------|-----------|
| Exhaust manifold type | Dry | |
| Exhaust flow at rated kW, m³/min. (cfm) | 8.8 (310) | 7.4 (260) |
| Exhaust temperature at rated kW, dry exhaust, °C (°F) | 724 (1335) | |
| Maximum allowable back pressure, kPa (in. Hg) | 10.2 (3.0) | |
| Exhaust outlet size at engine hookup, mm (in.) | 63 (2.5) OD | |

Fuel

| Fuel System | |
|---|-----------------------|
| Fuel type | LP Gas or Natural Gas |
| Fuel supply line inlet | 1 in. NPT |
| Natural gas fuel supply pressure, kPa (in. H ₂ O) | 1.74-2.74 (7-11) |
| LPG vapor withdrawal fuel supply pressure, kPa (in. H ₂ O) | 1.24-2.74 (5-11) |

| Fuel Composition Limits * | Nat. Gas | LP Gas |
|--|------------|-------------|
| Methane, % by volume | 90 min. | — |
| Ethane, % by volume | 4.0 max. | — |
| Propane, % by volume | 1.0 max. | 85 min. |
| Propene, % by volume | 0.1 max. | 5.0 max. |
| C ₄ and higher, % by volume | 0.3 max. | 2.5 max. |
| Sulfur, ppm mass | 25 max. | |
| Lower heating value, MJ/m³ (Btu/ft³), min. | 33.2 (890) | 84.2 (2260) |

* Fuels with other compositions may be acceptable. If your fuel is outside the listed specifications, contact your local distributor for further analysis and advice.

Lubrication

| Lubricating System | |
|---------------------------------------|---------------|
| Type | Full Pressure |
| Oil pan capacity, L (qt.) | 4.3 (4.5) |
| Oil pan capacity with filter, L (qt.) | 4.7 (5.0) |
| Oil filter: quantity, type | 1, Cartridge |

Application Data

Cooling

| Radiator System | 60 Hz | 50 Hz |
|--|---------------------|-------------|
| Ambient temperature, °C (°F) | 45 (113) | |
| Radiator system capacity, including engine, L (gal.) | 15 (4) | |
| Engine jacket water flow, Lpm (gpm) | 110 (29) | 93 (24.5) |
| Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.) | 38 (2150) | 33.5 (1910) |
| Water pump type | Centrifugal | |
| Fan diameter, mm (in.) | qty. 3 @ 406 (16) | |
| Fan power requirements (powered by engine battery charging alternator) | 12VDC, 18 amps each | |

Operation Requirements

| Air Requirements | 60 Hz | 50 Hz |
|---|-----------|-----------|
| Radiator-cooled cooling air, m ³ /min. (scfm)† | 51 (1800) | 51 (1800) |
| Combustion air, m ³ /min. (cfm) | 2.61 (92) | 2.20 (78) |
| Air over engine, m ³ /min. (cfm) | 25 (900) | 25 (900) |

† Air density = 1.20 kg/m³ (0.075 lbm/ft³)

Fuel Consumption‡

| Natural Gas, m ³ /hr. (cfh) at % load | 60 Hz | 50 Hz |
|--|------------|------------|
| 100% | 15.4 (545) | 13.1 (463) |
| 75% | 12.6 (444) | 10.7 (377) |
| 50% | 9.9 (350) | 8.4 (298) |
| 25% | 7.2 (254) | 6.1 (216) |
| Exercise | 3.5 (122) | 3.5 (122) |
| LP Gas, m ³ /hr. (cfh) at % load | 60 Hz | 50 Hz |
| 100% | 6.3 (224) | 5.4 (190) |
| 75% | 5.2 (182) | 4.4 (155) |
| 50% | 4.1 (145) | 3.5 (123) |
| 25% | 3.0 (106) | 2.5 (90) |
| Exercise | 1.4 (48) | 1.4 (48) |

‡ Nominal Fuel Rating: Natural gas, 37 MJ/m³ (1000 Btu/ft³)
LP Vapor, 93 MJ/m³ (2500 Btu/ft³)

LP vapor conversion factors:
8.58 ft.³ = 1 lb.
0.535 m³ = 1 kg.
36.39 ft.³ = 1 gal.

Sound Enclosure Features

- Sound-attenuating enclosure uses acoustic insulation that meets UL 94 HF1 flammability classification and repels moisture absorption.
- Internally mounted critical silencer.
- Skid-mounted, aluminum construction with two removable access panels.
- Fade-, scratch-, and corrosion-resistant Kohler® cashmere powder-baked finish.


Sound Data

Model 38RCL 8 point logarithmic average sound levels are 58 dB(A) during weekly engine exercise and 61 dB(A) during full-speed generator diagnostics and normal operation. The lowest point sound levels are 56 dB(A) and 59 dB(A) respectively as compared to competitor ratings.*

All sound levels are measured at 7 meters with no load.

* Lowest of 8 points measured around the generator. Sound levels at other points around generator may be higher depending on installation parameters.

RDC2 Controller

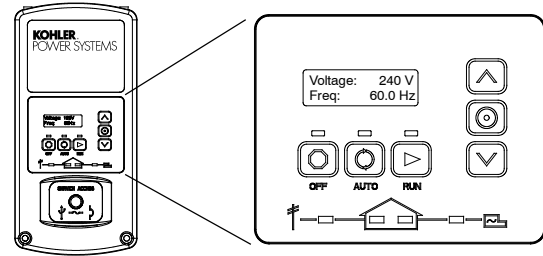

The RDC2 controller provides integrated control for the generator set, Kohler® Model RXT transfer switch, programmable interface module (PIM), and load control module (LCM).

The RDC2 controller's 2-line LCD screen displays status messages and system settings that are clear and easy to read, even in direct sunlight or low light.

RDC2 Controller Features

- Membrane keypad:
 - OFF, AUTO, and RUN pushbuttons
 - Select and arrow buttons for access to system configuration and adjustment menus
- LED indicators for OFF, AUTO, and RUN modes
- LED indicators for utility power and generator set source availability and ATS position (Model RXT transfer switch required)
- LCD screen:
 - Two lines x 16 characters per line
 - Backlit display with adjustable contrast for excellent visibility in all lighting conditions
- Scrolling system status display
 - Generator set status
 - Voltage and frequency
 - Engine temperature
 - Oil pressure
 - Battery voltage
 - Engine runtime hours
- Date and time displays
- Smart engine cooldown senses engine temperature
- Digital isochronous governor to maintain steady-state speed at all loads
- Digital voltage regulation: ± 1.0% RMS no-load to full-load
- Automatic start with programmed cranking cycle
- Programmable exerciser can be set to start automatically on any any future day and time, and to run every week or every two weeks
- Exercise modes
 - Unloaded exercise with complete system diagnostics
 - Unloaded full-speed exercise
 - Loaded full-speed exercise (Model RXT ATS required)
- Front-access mini USB connector for SiteTech™ connection
- Integral Ethernet connector for Kohler® OnCue®
- Built-in 2.5 amp battery charger
- Remote two-wire start/stop capability for optional connection of Model RDT or RSB transfer switches

See additional controller features on the next page.

Additional RDC2 Controller Features

- Diagnostic messages
 - Displays diagnostic messages for the engine, generator, Model RXT transfer switch, programmable interface module (PIM), and load control module (LCM)
 - Over 70 diagnostic messages can be displayed
- Maintenance reminders
- System settings
 - System voltage, frequency, and phase
 - Voltage adjustment
 - Measurement system, English or metric
- ATS status (Model RXT ATS required)
 - Source availability
 - ATS position (normal/utility or emergency/generator)
 - Source voltage and frequency
- ATS control (Model RXT ATS required)
 - Source voltage and frequency settings
 - Engine start time delay
 - Transfer time delays
 - Fixed pickup and dropout settings
 - Voltage calibration
- Programmable Interface Module (PIM) status displays
 - Input status (active/inactive)
 - Output status (active/inactive)
- Load control module (LCM) menus
 - Load status
 - Test function

Generator Set Standard Features

- Aluminum sound enclosure with enclosed silencer
- Battery rack and cables
- Electronic, isochronous governor
- Flexible fuel line
- Gas fuel system (includes fuel mixer, electronic secondary gas regulator, two gas solenoid valves, and flexible fuel line between the engine and the skid-mounted fuel system components)
- Integral vibration isolation
- Line circuit breaker
- Oil drain extension
- Operation and installation literature
- RDC2 controller with built-in battery charger
- Standard five-year or 2000 hour limited warranty

Available Options

Approvals and Listings

- ☐ UL 2200 Listing (60 Hz only)
- ☐ CSA Approval (60 Hz only)

Communication Accessories

- ☐ OnCue® Plus Generator Management System for remote monitoring (see specification sheet G6-140)
- ☐ OnCue® Plus Wireless Generator Management System for remote monitoring (see specification sheet G6-137)

Electrical System

- ☐ Battery
- ☐ Battery Heater

Starting Aids

- ☐ Block Heater
[recommended for ambient temperatures below 0°C (32°F)]

Controller Accessories

- ☐ Programmable Interface Module (PIM)
(provides 2 digital inputs and 6 relay outputs)
- ☐ Load Control Module (LCM)
(provides 4 power relays and 2 HVAC relays)

Transfer Switch

- ☐ Model RXT Automatic Transfer Switch (see G11-121)
- ☐ Model RDT Automatic Transfer Switch (see G11-98)
- ☐ Model RSB Automatic Transfer Switch (see G11-101)

Miscellaneous

- ☐ Rated Power Factor Testing

Literature

- ☐ General Maintenance Literature Kit
- ☐ Overhaul Literature Kit
- ☐ Production Literature Kit

Other Options


- ☐ _____
- ☐ _____
- ☐ _____

Dimensions and Weights

Overall Size, L x W x H, mm (in.): 2280 x 836 x 1147
(89.8 x 32.9 x 45.2)

Shipping Weight, wet, kg (lb.): 789 (1740)

Weight includes generator set with engine fluids and 4Q10X alternator, sound enclosure, and silencer.

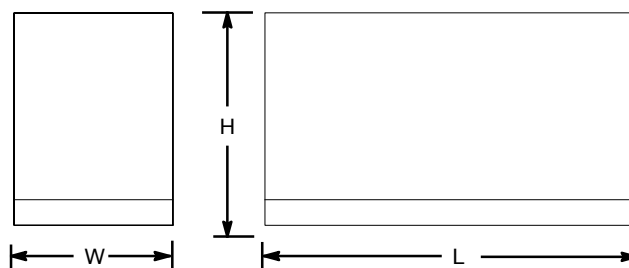

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY: