

# iPro2500

## 2500 Watt Digital Inverter Gasoline Portable Generator

2200 Running Watts | 2500 Peak Watts



<3% THD   
SINE WAVE OUTPUT



Built-in carry handle for easy transportation

Fuel efficient, 1 gallon fuel tank that runs 8 hrs at 25% load

Added air vents to keep unit cool while running

OSHA compliant 120V 20A 5-20R GFCI outlet

Two 5V USB ports for charging sensitive electronics such as phones or tablets



Dependable 3.4 HP 98cc OHV 4-Stroke Westinghouse engine



Double-insulated acoustic enclosure and low tone mufflers to reduce operating noise



ENGINE/FUEL CONTROL SWITCH

LOW OIL, OVERLOAD & OUTPUT READY INDICATOR LIGHTS


EFFICIENCY MODE

120V AC GFCI POWER OUTLETS WITH DUST COVER

GROUND

USB PORTS WITH DUST COVER

CIRCUIT BREAKER

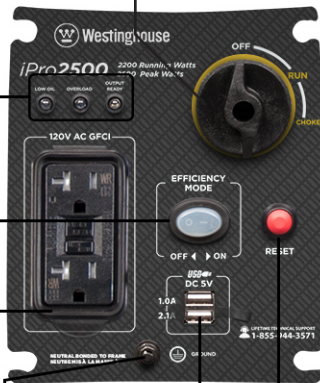

### What Comes in the Box



# iPro2500

## Inverter Generator Specifications



Gasoline Peak Watts	2500
Gasoline Running Watts	2200
Peak Amps at 120V	20.8 amps
Running Amps at 120V	18.3 amps
AC Voltage	120 Volts
DC Voltage	5 Volts
AC Frequency	60 Hz
Parallel Capable with WHPC cord (sold separate)	No
Engine Horse Power (HP)	3.4 HP
Total Harmonic Distortion (THD)	<3%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Recoil
Battery	No
Engine Displacement	98cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine Speed	Variable
Engine RPM	Max 5200
Operational Volume at 25% Load	52 dBA
Operational Volume at 50% Load	59 dBA
Spark Plug (included)	Torch E6RTC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140542
Economy Mode Switch	Yes
Built-in Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.37 qt. (11.8 oz.)
Oil Capacity (Quarts/Ounces)	.37 qt. (11.8 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	1 gal. (3.8 L)

Run Time at %25 Load (hrs.)	8 hrs.
Run Time at %50 Load (hrs.)	6 hrs.
Gasoline Fuel Gauge	No
Choke type	Manual
Choke Location	Control Panel
AC Outlets	(1) Duplex 120V 20A GFCI (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Neutral Bonded to Frame
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready (ST Switch)	No
GFCI Outlets	Yes
LED Data Center	No
RV Ready Outlet	No
Overload Protection (circuit breaker)	Yes
Handle Style	Single, molded in case
Wheel Kit	No
Emissions	EPA, CARB
Canada CSA Compliant	No
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years or 1000 hrs.
Commercial Warranty	6 Months or 1000 hrs.
Assembled Length in. (mm)	19.8 in. (249 mm)
Assembled Width in. (mm)	11.4 in. (290 mm)
Assembled Height in. (mm)	17.9 in. (455 mm)
Carton Length in. (mm)	19.7 in. (500 mm)
Carton Width in. (mm)	11.2 in. (285 mm)
Carton Height in. (mm)	17.9 in. (455 mm)
Dry Unit Weight lb. (kg)	48.4 lb. (22 kg)
Shipping Weight lb. (kg)	56.2 lb. (25.5 kg)
UPC	855464003995
GTIN	00855464003995

09212017KD\_NCSA  
 ©2017 Westinghouse Portable Power  
 Specifications are subject to change without notice  
 Westinghouse Portable Power  
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team  
 at [service@wpowereq.com](mailto:service@wpowereq.com) or call  
 855.944.3571**

