

ENGINE

- Mitsubishi® L3E – liquid cooled, diesel engine
 - Standby - 12.2 hp @ 1800 rpm
 - Prime - 10.5 hp @ 1800 rpm
 - 1.0 L displacement, 3 cylinder
 - ECOSpeed™ EPA Final Tier 4 compliant multi-speed operation
- Polyethylene Fuel Tank:
 - Fuel Type: Diesel
 - Fuel Capacity: 39.9 gal (151.04 L)
 - External 3.5 in. (89 mm) fill port
- Fuel Consumption:
 - Lights Only: 0.195 gph (0.738 Lph)*
 - Full Load: 0.549 gph (2.078 Lph)*
 - Maximum Runtime (Lights Only): 205* hours
- Cooling system allows operation to 120°F (49°C) ambient
- 750-hour** service interval
- Full flow oil filter, spin on type
- Dry type cartridge air filter
- Wind Rating: 65 mph (105 kph)



**Results based on engine manufacturer and field test data after 100-hour engine break-in period and may vary based on factors including age and maintenance of equipment, environmental conditions and fuel density. Consult the Owner's Manual for fuel and maintenance recommendations.*

***To achieve maximum service interval, replacement of oil filter after 50-hour break-in period is required. Consult Owner's Manual for required oil filter model number.*

GENERATOR


- Marathon Electric®, Brushless
- Output:
 - Up to 6kW standby
 - Up to 5kW (lights on)
- 120/240 VAC – 50/25A
- +/-1% automatic voltage regulation

ELECTRICAL CONTROLS

- Power Zone Autolight Controller
- Automated dusk to dawn or 7-day scheduler operation
- One touch manual starting
- Individual light fixture control
- Back-lit LCD display -40°F/C rated heated display.
- Three (3) programmable service timers for Fuel Filter, Air Filter and Oil Service
- Alarms and comprehensive warnings
- Electrical trip or shutdown protection upon fault condition
- Key pad controlled electric mast optioned deployment

FLOODLIGHTS

- Four (4) 296W LED fixtures
- Efficiency: 145 lumens per watt
- Luminous Flux: 4 X 43,050: 172,200 lumens
- IP68 LED modules; IP65 rated drivers
- Aluminum / Poly construction housing
- Fixture-mounted LED drivers
- 30VDC mast cord and fixture

**ELECTRICAL SYSTEM**

- 30A outlet breaker
- Individual floodlight circuits with sealed 5A breakers
 - (1) 120 VAC 20 Amp GFCI duplex outlet (NEMA 5-20R type)
 - (1) 240 VAC 30 Amp twist lock outlet (NEMA L6-30R type)
- Wiring is sized and fused to the amperage draw required
- 440CCA wet cell battery

MAST

- Vertical mast; 23 ft. (7 m), 5-section with ground adjustable light fixtures
- Dual handle manual winch for ease of deployment; electric winch optional
- Distinctive angled fixture mount for common light distribution
- 359° ground rotational mast with mast fully extended
- Industrial black powder coat finish with polymer guides
- Self-retracting coiled mast cord



ENCLOSURE

- Injection-molded hood enclosure with UV protected colorant
- Flip hood engine compartment for ease of service
- Multi-lingual operating/safety decals
- License plate holder with light
- Manual holder with operating manual
- 63 dB(A) @ 23 ft. (7 m) – low speed operation
- Equipped with single lifting eye and fork pockets

TRAILER

- Tubular steel frame
- Three (3) 1200 lb. (544 kg) tube and sleeve leveling jacks
- All jacks transport and lock in position for storage
- Side outriggers deployed – 10 ft. (305 cm) span
- 7800 lb. (3538 kg) safety chains with spring loaded safety hooks
- 2 in. (50.8 mm) ball hitch
- Molded polyethylene fenders
- DOT approved LED tail, side, brake, and directional lights
- 2200 lb. (998 kg) leaf spring axle
- ST175/80D13 – 6 ply
- 47 in. (117 cm) track width

LIGHT TOWER COVERAGE (feet)
Fixtures @ 20° downward tilt

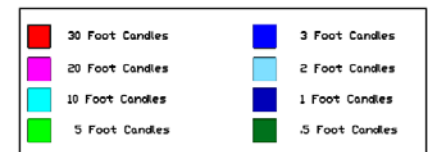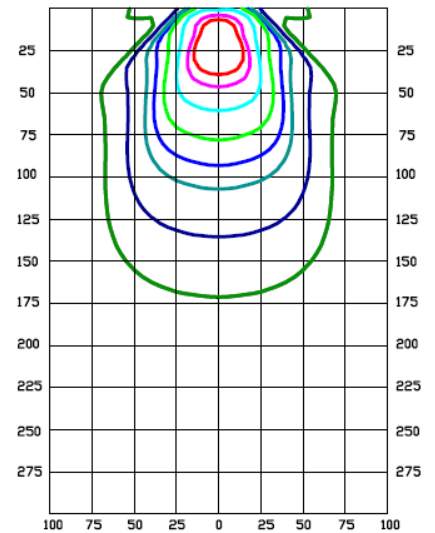

WEIGHT & DIMENSIONS

- Dry weight: 1340 lbs. (608 kg)
- Operating weight: 1630 lbs. (739 kg)
- Mast stowed: 118 x 57 x 101 in. (3.0 x 1.45 x 2.6 m)

WARRANTY

2 Year / 2000 Hour on tower; 5 Year limited warranty on LED modules and drivers

CERTIFICATIONS

CSA Approved / Listed

OPTIONS

Contact sales representative or factory for a list of current available options.

For more information, consult the Owner's Manual at <http://www.generacmobileproducts.com/resources-tools/manuals>